

ORDINANCE NO. 4818
File No. Z0220-0129

AN ORDINANCE AMENDING THE MESQUITE ZONING ORDINANCE BY APPROVING A CHANGE OF ZONING FROM AGRICULTURE AND PLANNED DEVELOPMENT DISTRICT ORDINANCE NO. 3538 TO PLANNED DEVELOPMENT DISTRICT ON PROPERTY LOCATED SOUTHWEST OF EAST CARTWRIGHT ROAD AND BOTH NORTHWEST AND SOUTHEAST OF FAITHON P. LUCAS SR. BOULEVARD TO ALLOW A MASTER-PLANNED COMMUNITY THAT WOULD PROVIDE DEVELOPMENT STANDARDS AND ALLOW MIXED USES, RESIDENTIAL AND COMMERCIAL USES; REPEALING ALL ORDINANCES IN CONFLICT WITH THE PROVISIONS OF THIS ORDINANCE; PROVIDING A SEVERABILITY CLAUSE; PROVIDING A PENALTY NOT TO EXCEED \$2,000.00; AND PROVIDING AN EFFECTIVE DATE.

WHEREAS, the Planning and Zoning Commission and the City Council, in compliance with the Charter of the City of Mesquite, state laws and the zoning ordinance, have given the required notices and held the required public hearings regarding the rezoning of the Property; and

WHEREAS, the City Council finds that it is in the public interest to grant this change in zoning.

NOW, THEREFORE, BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF MESQUITE, TEXAS:

SECTION 1. The subject property is an approximately 1,424.398-acre tract located southwest of East Cartwright Road and both northwest and southeast of Faithon P. Lucas Sr. Boulevard and is more fully described in the legal description attached hereto as Exhibit A (collectively known as the “**Property**”).

SECTION 2. The Mesquite Zoning Ordinance is amended by approving a change of zoning for the Property from Agriculture and Planned Development District Ordinance No. 3538 to Planned Development District, subject to the (i) Planned Development District Development Regulations, (ii) the Concept Plan, (iii) the Phase 1 Concept Plan, (iv) the Parks, Trails, and Open Space Plan, (v) Development Standards, (vi) Residential Types, (vii) Anti-Repetition Requirements for Single Family Detached Homes and Duplexes, (viii) Tree Preservation, and (ix) Permitted Non-Standards Street Sections, attached hereto as Exhibits B through I respectively and incorporated herein by reference, to allow a master-planned community that would provide development standards and all mixed uses, residential and commercial uses.

SECTION 3. All ordinances, or portions thereof, of the City of Mesquite in conflict with the provisions of this ordinance, to the extent of such conflict are hereby repealed; otherwise, they shall remain in full force and effect.

SECTION 4. The Property shall be used only in the manner and for the purposes provided for by the Mesquite Zoning Ordinance, as amended.

SECTION 5. Should any word, sentence, clause, paragraph or provision of this ordinance be held to be invalid or unconstitutional, the remaining provisions of this ordinance shall remain in full force and effect.

SECTION 6. Any person (as defined in Chapter 1, Section 1-2 of the Code of the City of Mesquite, Texas, as amended) violating any of the provisions or terms of this ordinance shall be deemed to be guilty of a Class C Misdemeanor and upon conviction thereof, shall be subject to a fine not to exceed Two Thousand (\$2,000.00) Dollars for each offense, provided, however, if the maximum penalty provided for by this ordinance for an offense is greater than the maximum penalty provided for the same offense under the laws of the State of Texas, the maximum penalty for violation of this ordinance for such offense shall be the maximum penalty provided by the laws of the State of Texas. Each day or portion of a day any violation of this ordinance continues shall constitute a separate offense.

SECTION 7. This ordinance shall take effect and be in force from and after five days after publication.

DULY PASSED AND APPROVED by the City Council of the City of Mesquite, Texas, on the 5th day of October 2020.



Bruce Archer
Mayor

ATTEST:



Sonja Land
City Secretary

APPROVED AS TO LEGAL FORM:



David L. Paschall
City Attorney

Exhibit A
Metes and Bounds Description of the Property

LEGAL DESCRIPTION
1424.398 ACRES

BEING A 1424.398 ACRE TRACT OF LAND SITUATED IN THE CITY OF MESQUITE, DALLAS COUNTY, TEXAS AND BEING PART OF THE J. ANDERSON SURVEY, ABSTRACT NO. 1, AND BEING ALL OF A CALLED 34.5 ACRE TRACT OF LAND CONVEYED AS "TRACT 1", ALL OF A CALLED 3.8 ACRE TRACT OF LAND CONVEYED AS "TRACT 2", ALL OF A CALLED 44.5 ACRE TRACT OF LAND CONVEYED AS "TRACT 3", ALL OF A CALLED 95.3 ACRE TRACT OF LAND CONVEYED AS "TRACT 4", PART OF THE REMAINDER OF A CALLED 400 ACRE TRACT OF LAND CONVEYED AS "TRACT 5", PART OF THE REMAINDER OF A CALLED 204.13 ACRE TRACT OF LAND CONVEYED AS "TRACT 6", PART OF THE REMAINDER OF A CALLED 140.65 ACRE TRACT OF LAND CONVEYED AS "TRACT 7", PART OF A CALLED 32 ACRE TRACT OF LAND CONVEYED AS "TRACT 8", PART OF A CALLED 54.15 ACRE TRACT OF LAND CONVEYED AS "TRACT 9", PART OF A CALLED 25 ACRE TRACT OF LAND CONVEYED AS "TRACT 10", PART OF THE REMAINDER OF A CALLED 132.42 ACRE TRACT OF LAND CONVEYED AS "TRACT 11", PART OF A CALLED 25 ACRE TRACT OF LAND CONVEYED AS "TRACT 12", PART OF CALLED 77.4 ACRE TRACT OF LAND CONVEYED AS "TRACT 13", TO LUCAS FARMS JOINT VENTURE, AS RECORDED IN VOLUME 93153, PAGE 8170, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS, AND BEING PART OF THE REMAINDER OF A CALLED 119.95 ACRE TRACT OF LAND CONVEYED TO CAROLYN LUCAS BASS, TRUSTEE, AS RECORDED IN VOLUME 92253, PAGE 1749, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS, AND ALL OF A CALLED 2.694 ACRE TRACT OF LAND CONVEYED TO LUCAS FARMS JOINT VENTURE, AS RECORDED IN VOLUME 2005041, PAGE 178, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS, AND ALL OF A CALLED 2.06 ACRE TRACT OF LAND CONVEYED TO THE GEORGE F. LUCAS IRREVOCABLE DESCENDANT'S TRUST, AS RECORDED IN COUNTY CLERK'S FILE NO. 200213402221, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS, ALL OF A CALLED 40 ACRE TRACT CONVEYED AS "TRACT NO. 1", PART OF A CALLED 75 ACRE TRACT OF LAND CONVEYED AS "TRACT NO. 2", ALL OF A TRACT OF LAND CONVEYED AS "TRACT NO. 3" AND ALL OF A CALLED 4/10ths OF AN ACRE TRACT CONVEYED AS "TRACT NO. 4", TO THE FAITHON PANTELI LUCAS JR. FAMILY TRUST, AS RECORDED IN COUNTY CLERK'S FILE NO. 20050391371, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS, ALL OF A CALLED 50 ACRE TRACT OF LAND CONVEYED TO CAROLYN LUCAS BASS, TRUSTEE, AS RECORDED IN VOLUME 93013, PAGE 67, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS AND ALL OF A CALLED 93.910 ACRE TRACT OF LAND CONVEYED TO CAROLYN LUCAS BASS, TRUSTEE OF THE GEORGE F. LUCAS IRREVOCABLE DESCENDANTS' TRUST, AS RECORDED IN VOLUME 93013, PAGE 70, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS. SAID 1424.398 ACRE TRACT, WITH BEARING BASIS BEING GRID NORTH, TEXAS STATE PLANE COORDINATES, NORTH CENTRAL ZONE, NAD83 DATUM (NAD83 2011, EPOCH DATE 2010), DETERMINED BY GPS OBSERVATIONS, CALCULATED FROM

ARLINGTON RRP2 CORS ARP (PID-DF5387) AND DALLAS CORS ARP (PID-DF8984). BEING MORE PARTICULARLY DESCRIBED BY METES AND BOUNDS AS FOLLOWS:

BEGINNING AT THE NORTH CORNER OF SAID "TRACT 4", SAID POINT BEING IN THE APPROXIMATE CENTERLINE OF FAITHON P. LUCAS SR. BOULEVARD (A VARIABLE WIDTH PRESCRIPTIVE RIGHT-OF-WAY), FROM WHICH THE WEST CORNER OF LOT 1A, BLOCK A OF DR. JOHN D. HORN HIGH SCHOOL, AN ADDITION TO THE CITY OF MESQUITE, AS RECORDED IN COUNTY CLERK'S FILE NO. 200503600834, MAP RECORDS, DALLAS COUNTY, TEXAS BEARS SOUTH 45 DEGREES 55 MINUTES 12 SECONDS EAST, A DISTANCE OF 57.56 FEET;

THENCE, ALONG THE NORTHEAST LINE OF SAID "TRACT 4" AND THE SOUTHWEST LINE OF SAID LOT 1A, BLOCK A, THE FOLLOWING COURSES AND DISTANCES:

SOUTH 45 DEGREES 55 MINUTES 12 SECONDS EAST, A DISTANCE OF 1772.56 FEET TO A POINT FOR CORNER;

SOUTH 46 DEGREES 39 MINUTES 23 SECONDS EAST, A DISTANCE OF 82.92 FEET TO AN EAST CORNER OF SAID "TRACT 4", THE SOUTH CORNER OF SAID LOT 1A, BLOCK A, THE NORTH CORNER OF A CALLED 35.848 ACRE TRACT OF LAND CONVEYED TO MESQUITE INDEPENDENT SCHOOL DISTRICT, AS RECORDED IN COUNTY CLERK'S FILE NO. 201800303367, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS AND THE WEST CORNER OF A CALLED 22.344 ACRE TRACT OF LAND CONVEYED TO MESQUITE INDEPENDENT SCHOOL DISTRICT, AS RECORDED IN COUNTY CLERK'S FILE NO. 20080016792, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS;

THENCE, SOUTH 15 DEGREES 50 MINUTES 01 SECONDS WEST, ALONG THE SOUTHEAST LINE OF SAID "TRACT 4" AND THE NORTHWEST LINE OF SAID 35.848 ACRE TRACT, A DISTANCE OF 374.36 FEET TO A POINT FOR CORNER;

THENCE, OVER AND ACROSS SAID "TRACT 13" AND ALONG THE WEST LINE OF SAID 35.848 ACRE TRACT, THE FOLLOWING COURSES AND DISTANCES:

SOUTH 01 DEGREES 52 MINUTES 36 SECONDS WEST, A DISTANCE OF 439.47 FEET TO A POINT FOR CORNER;

SOUTH 11 DEGREES 29 MINUTES 48 SECONDS WEST, A DISTANCE OF 510.05 FEET TO A POINT FOR CORNER;

SOUTH 28 DEGREES 33 MINUTES 30 SECONDS WEST, A DISTANCE OF 159.13 FEET TO A POINT FOR CORNER;

SOUTH 78 DEGREES 45 MINUTES 14 SECONDS EAST, A DISTANCE OF 145.44 FEET TO A POINT FOR CORNER;

SOUTH 45 DEGREES 10 MINUTES 23 SECONDS EAST, A DISTANCE OF 552.67 FEET TO A POINT FOR CORNER ON THE SOUTH LINE OF SAID "TRACT 13" AND THE NORTH LINE OF AFORESAID "TRACT NO. 1";

THENCE, NORTH 89 DEGREES 36 MINUTES 40 SECONDS EAST, ALONG SAID SOUTH LINE OF "TRACT 13", SAID NORTH LINE OF "TRACT NO. 1" AND THE SOUTH LINE OF SAID 35.848 ACRE TRACT, A DISTANCE OF 479.07 FEET TO A POINT FOR CORNER;

THENCE, OVER AND ACROSS SAID "TRACT 13" AND ALONG THE SOUTHEAST LINE OF SAID 35.848 ACRE TRACT, THE FOLLOWING COURSES AND DISTANCES:

NORTH 44 DEGREES 31 MINUTES 33 SECONDS EAST, A DISTANCE OF 465.08 FEET TO A POINT FOR CORNER;

NORTH 11 DEGREES 51 MINUTES 46 SECONDS EAST, A DISTANCE OF 209.22 FEET TO A POINT FOR CORNER;

SOUTH 78 DEGREES 08 MINUTES 24 SECONDS EAST, A DISTANCE OF 100.00 FEET TO A POINT FOR CORNER;

NORTH 11 DEGREES 51 MINUTES 46 SECONDS EAST, A DISTANCE OF 144.00 FEET TO A POINT FOR THE EAST CORNER OF SAID 35.848 ACRE TRACT, SAID POINT BEING ON THE NORTHEAST LINE OF SAID "TRACT 13" AND THE SOUTHWEST LINE OF A CALLED 134.201 ACRE TRACT OF LAND CONVEYED TO W.A. RIDGE RANCH, LLC, AS RECORDED IN COUNTY CLERK'S FILE NO. 20080025063, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS;

THENCE, SOUTH 44 DEGREES 49 MINUTES 06 SECONDS EAST, ALONG SAID NORTHEAST LINE OF "TRACT 13" AND SAID SOUTHWEST LINE OF 134.201 ACRE TRACT, A DISTANCE OF 404.14 FEET TO A SOUTHEAST CORNER OF SAID "TRACT 13", SAID POINT BEING IN THE APPROXIMATE CENTER LINE OF HOLLOMAN ROAD (A VARIABLE WIDTH PRESCRIPTIVE RIGHT-OF-WAY – CLOSED);

THENCE, SOUTH 00 DEGREES 16 MINUTES 51 SECONDS EAST, ALONG THE EAST LINE OF SAID "TRACT 13", ALONG THE EAST LINE OF SAID "TRACT NO. 1" AND WITH SAID APPROXIMATE CENTERLINE OF HOLLOMAN ROAD, A DISTANCE OF 1683.70 FEET TO THE SOUTH CORNER OF SAID "TRACT NO. 1";

THENCE, SOUTH 89 DEGREES 01 MINUTES 52 SECONDS WEST, ALONG THE SOUTH LINE OF SAID "TRACT NO. 1" AND WITH SAID APPROXIMATE

CENTERLINE OF HOLLOMAN ROAD, A DISTANCE OF 1156.84 FEET TO THE NORTHEAST CORNER OF AFORESAID "TRACT NO. 4";

THENCE, SOUTH 22 DEGREES 10 MINUTES 12 SECONDS WEST, ALONG THE SOUTHEAST LINE OF SAID "TRACT NO. 4" AND WITH SAID APPROXIMATE CENTERLINE OF HOLLOMAN ROAD, A DISTANCE OF 114.85 FEET TO THE SOUTH CORNER OF SAID "TRACT NO. 4", SAID POINT BEING ON THE NORTHEAST LINE OF AFORESAID "TRACT NO. 2" AND THE SOUTHWEST LINE OF A CALLED 93.102 ACRE TRACT OF LAND CONVEYED AS "TRACT II" TO W.A. RIDGE RANCH, LLC., AS RECORDED IN COUNTY CLERK'S FILE NO. 20070458237, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS;

THENCE, SOUTH 45 DEGREES 12 MINUTES 59 SECONDS EAST, ALONG THE NORTHEAST LINE OF SAID "TRACT NO. 2", THE SOUTHWEST LINE OF SAID 93.102 ACRE TRACT, WITH THE NORTHEAST LINE OF SAID HOLLOWMAN ROAD, A DISTANCE OF 636.15 FEET TO THE EAST CORNER OF SAID "TRACT NO. 2" AND THE NORTH CORNER OF A CALLED 18.674 ACRE TRACT OF LAND CONVEYED TO W.A. RIDGE RANCH, LLC., AS RECORDED IN COUNTY CLERK'S FILE NO. 200900124560, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS;

THENCE, SOUTH 44 DEGREES 24 MINUTES 00 SECONDS WEST, A DISTANCE OF 531.59 FEET TO A POINT FOR CORNER;

THENCE, SOUTH 44 DEGREES 24 MINUTES 00 SECONDS WEST, ALONG THE SOUTHEAST LINE OF SAID "TRACT NO. 2" AND THE NORTHWEST LINE OF SAID 18.674 ACRE TRACT, A DISTANCE OF 531.59 FEET TO A WEST CORNER OF SAID 18.674 ACRE TRACT AND THE NORTH CORNER OF AFORESAID 93.910 ACRE TRACT;

THENCE, ALONG THE NORTHEAST LINE OF SAID 93.910 ACRE TRACT AND THE SOUTHWEST LINE OF SAID 18.674 ACRE TRACT, THE FOLLOWING COURSES AND DISTANCES:

SOUTH 43 DEGREES 25 MINUTES 58 SECONDS EAST, A DISTANCE OF 774.12 FEET TO A POINT FOR CORNER;

SOUTH 66 DEGREES 55 MINUTES 58 SECONDS EAST, A DISTANCE OF 1509.42 FEET TO AN EAST CORNER OF SAID 93.910 ACRE TRACT, THE EAST CORNER OF SAID 18.674 ACRE TRACT AND THE SOUTH CORNER OF AFORESAID 93.102 ACRE TRACT, SAID POINT BEING ON THE NORTHWEST RIGHT-OF-WAY LINE OF LAWSON ROAD (A VARIABLE WIDTH RIGHT-OF-WAY);

THENCE, SOUTH 44 DEGREES 14 MINUTES 05 SECONDS WEST, ALONG THE SOUTHEAST LINE OF SAID 93.910 ACRE TRACT, A DISTANCE OF 1905.91 FEET TO THE SOUTH CORNER OF SAID 93.910 ACRE TRACT;

THENCE, NORTH 45 DEGREES 07 MINUTES 20 SECONDS WEST, ALONG THE SOUTHWEST LINE OF SAID 93.910 ACRE TRACT, A DISTANCE OF 2185.14 FEET TO THE WEST CORNER OF SAID 93.910 ACRE TRACT, SAID POINT BEING ON THE SOUTHEAST LINE OF AFORESAID "TRACT NO. 2";

THENCE, SOUTH 44 DEGREES 24 MINUTES 00 SECONDS WEST, ALONG SAID SOUTHEAST LINE OF "TRACT NO. 2", A DISTANCE OF 820.11 FEET TO A SOUTHWEST CORNER OF SAID "TRACT NO. 2", SAID POINT BEING ON THE NORTHEAST LINE OF A CALLED 23.889 ACRE TRACT OF LAND CONVEYED TO MARC S. ENGLISH, AS RECORDED IN COUNTY CLERK'S FILE NO. 20050848444, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS;

THENCE, NORTH 45 DEGREES 23 MINUTES 37 SECONDS WEST, ALONG THE SOUTHWEST LINE OF SAID "TRACT NO. 2" AND THE NORTHEAST LINE OF SAID 23.889 ACRE TRACT, A DISTANCE OF 39.71 FEET TO THE EAST CORNER OF A CALLED 34.151 ACRE TRACT OF LAND CONVEYED TO ROBERT EUGENE CARATHERS & MARGARET LAVERNE CARATHERS, AS RECORDED IN VOLUME 82119, PAGE 2365, DEED RECORDS, DALLAS COUNTY, TEXAS;

THENCE, SOUTH 44 DEGREES 56 MINUTES 37 SECONDS WEST, ALONG THE SOUTHEAST LINE OF SAID 34.151 ACRE TRACT AND THE NORTHWEST LINE OF SAID 23.889 ACRE TRACT, A DISTANCE OF 1768.63 FEET TO THE SOUTH CORNER OF SAID 34.151 ACRE TRACT AND THE WEST CORNER OF SAID 23.889 ACRE TRACT, SAID POINT BEING ON THE NORTHEAST LINE OF A CALLED 102.8043 ACRE TRACT OF LAND CONVEYED TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 93248, PAGE 2192, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS;

THENCE, NORTH 45 DEGREES 27 MINUTES 20 SECONDS WEST, ALONG THE SOUTHWEST LINE OF SAID 34.151 ACRE TRACT, THE NORTHEAST LINE OF SAID 102.8043 ACRE TRACT AND AFORESAID NORTHEAST LINE OF 56.542 ACRE TRACT, A DISTANCE OF 1785.44 FEET TO THE WEST CORNER OF SAID 34.179 ACRE TRACT AND THE SOUTH CORNER OF AFORESAID 50 ACRE TRACT, SAID POINT BEING ON THE NORTHEAST LINE OF A CALLED 56.542 ACRE TRACT OF LAND CONVEYED TO IH 20 IP LLC, AS RECORDED IN COUNTY CLERK'S FILE NO. 201800208658, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS

THENCE, NORTH 45 DEGREES 23 MINUTES 37 SECONDS WEST, ALONG THE SOUTHWEST LINE OF SAID 50 ACRE TRACT, SAID NORTHEAST LINE OF 56.542 ACRE TRACT AND THE NORTHEAST LINE OF A CALLED 48.397 ACRE TRACT OF LAND CONVEYED TO THE CITY OF MESQUITE, AS RECORDED IN COUNTY CLERK'S FILE NO. 201800334776, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS, A DISTANCE OF 1242.86 FEET TO THE WEST CORNER OF SAID 50 ACRE TRACT AND THE NORTH CORNER OF SAID 48.397 ACRE TRACT, SAID POINT BEING IN THE APPROXIMATE CENTER LINE OF MCKENZIE ROAD (A VARIABLE WIDTH RIGHT-OF-WAY);

THENCE, NORTH 45 DEGREES 02 MINUTES 08 SECONDS EAST, ALONG THE NORTHWEST LINE OF SAID 50 ACRE TRACT AND THE SOUTHEAST LINE OF LOT 2, BLOCK 1 OF RALEIGH ESTATES, AN ADDITION TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 94065, PAGE 7930, MAP RECORDS, DALLAS COUNTY, TEXAS, A DISTANCE OF 1757.80 FEET TO THE NORTH CORNER OF SAID 50 ACRE TRACT, SAID POINT BEING ON THE SOUTHWEST LINE OF AFORESAID "TRACT 9";

THENCE, NORTH 45 DEGREES 06 MINUTES 33 SECONDS WEST, ALONG SOUTHWEST LINES OF SAID "TRACT 9", AFORESAID "TRACT 10" AND AFORESAID "TRACT 8", PASSING AT A DISTANCE OF 1947.95 FEET THE WEST CORNER OF SAID "TRACT 8", SAID POINT BEING ON THE SOUTHEAST RIGHT-OF-WAY LINE OF AFORESAID FAITHON P. LUCAS SR. BOULEVARD, CONTINUING OVER AND ACROSS SAID FAITHON P. LUCAS SR. BOULEVARD AND AFORESAID "TRACT 6", IN ALL A TOTAL DISTANCE OF 2029.43 FEET TO A POINT FOR CORNER;

THENCE, SOUTH 44 DEGREES 13 MINUTES 37 SECONDS WEST, CONTINUING OVER AND ACROSS SAID "TRACT 6" AND ALONG SAID NORTHWEST RIGHT-OF-WAY LINE OF FAITHON P. LUCAS SR. BOULEVARD, A DISTANCE OF 108.49 FEET TO THE SOUTH CORNER OF SAID "TRACT 6", SAID POINT BEING ON THE NORTHEAST LINE OF A TRACT OF LAND CONVEYED TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 94131, PAGE 491, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS;

THENCE, NORTH 45 DEGREES 29 MINUTES 32 SECONDS WEST, ALONG THE SOUTHWEST LINE OF "TRACT 6" AND SAID NORTHEAST LINE OF CITY OF MESQUITE TRACT, A DISTANCE OF 2326.02 FEET TO A POINT FOR CORNER ON THE SOUTHEAST LINE OF AFORESAID "TRACT 5";

THENCE, SOUTH 44 DEGREES 57 MINUTES 59 SECONDS WEST, ALONG SAID SOUTHEAST LINE OF "TRACT 5", A DISTANCE OF 87.32 FEET TO THE EAST CORNER OF THE HILLS AT TEALWOOD, PHASE I, AN ADDITION TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 2003168, PAGE 94, MAP RECORDS, DALLAS COUNTY, TEXAS;

THENCE, OVER AND ACROSS SAID "TRACT 5" AND ALONG THE NORTHEAST LINE OF SAID HILLS AT TEALWOOD, PHASE I, THE FOLLOWING COURSES AND DISTANCES:

NORTH 67 DEGREES 58 MINUTES 24 SECONDS WEST, A DISTANCE OF 404.99 FEET TO A POINT FOR CORNER;

NORTH 34 DEGREES 47 MINUTES 42 SECONDS WEST, A DISTANCE OF 310.64 FEET TO A POINT FOR CORNER;

SOUTH 88 DEGREES 34 MINUTES 17 SECONDS WEST, A DISTANCE OF 1055.19 FEET TO A POINT FOR CORNER;

NORTH 67 DEGREES 58 MINUTES 24 SECONDS WEST, A DISTANCE OF 400.00 FEET TO A POINT FOR CORNER;

NORTH 52 DEGREES 54 MINUTES 18 SECONDS WEST, A DISTANCE OF 807.77 FEET TO A POINT FOR CORNER;

NORTH 30 DEGREES 44 MINUTES 19 SECONDS WEST, A DISTANCE OF 381.66 FEET TO A NORTHWEST CORNER OF SAID HILLS AT TEALWOOD, PHASE I, SAID POINT BEING ON THE SOUTHEAST LINE OF A CALLED 88.069 ACRE TRACT OF LAND CONVEYED TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 90185, PAGE 2032, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS;

THENCE, NORTH 44 DEGREES 48 MINUTES 33 SECONDS EAST, OVER AND ACROSS SAID "TRACT 5", ALONG SAID SOUTHEAST LINE OF CITY OF MESQUITE TRACT AND ALONG THE SOUTHEAST LINE OF VALLEYCREEK ADDITION, PHASE TWO, AN ADDITION TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 86051, PAGE 3779, MAP RECORDS, DALLAS COUNTY, TEXAS, A DISTANCE OF 3684.59 FEET TO THE EAST CORNER OF SAID VALLEYCREEK ADDITION, PHASE TWO, SAID POINT ALSO BEING ON THE NORTHEAST LINE OF SAID "TRACT 5" AND THE SOUTHWEST LINE OF CEDARBROOK ESTATES, AN ADDITION TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 98228, PAGE 4, MAP RECORDS, DALLAS COUNTY, TEXAS;

THENCE, SOUTH 45 DEGREES 31 MINUTES 27 SECONDS EAST, ALONG SAID NORTHEAST LINE OF "TRACT 5" AND SAID SOUTHWEST LINE OF CEDARBROOK ESTATES, A DISTANCE OF 545.40 FEET TO AN EAST CORNER OF SAID "TRACT 5" AND THE SOUTH CORNER OF SAID CEDARBROOK ESTATES, SAID POINT BEING ON THE NORTHWEST LINE OF AFORESAID "TRACT 11";

THENCE, NORTH 44 DEGREES 49 MINUTES 26 SECONDS EAST, ALONG SAID NORTHWEST LINE OF "TRACT 11" AND THE SOUTHEAST LINE OF SAID CEDARBROOK ESTATES, A DISTANCE OF 34.66 FEET TO A NORTHWEST CORNER OF BONNIE LUCILLE GENTRY ELEMENTARY SCHOOL ADDITION, AN ADDITION TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 20033167, PAGE 146, MAP RECORDS, DALLAS COUNTY, TEXAS, SAID POINT BEING ON THE NORTHWEST LINE OF SAID "TRACT 11" AND THE SOUTHEAST LINE OF SAID CEDARBROOK ESTATES;

THENCE, OVER AND ACROSS SAID "TRACT 11" AND ALONG THE WEST LINE OF SAID BONNIE LUCILLE GENTRY ELEMENTARY SCHOOL ADDITION, THE FOLLOWING COURSES AND DISTANCES:

SOUTH 38 DEGREES 08 MINUTES 15 SECONDS EAST, A DISTANCE OF 69.48 FEET TO A POINT FOR CORNER;

SOUTH 16 DEGREES 08 MINUTES 19 SECONDS WEST, A DISTANCE OF 425.17 FEET TO A POINT FOR CORNER;

SOUTH 19 DEGREES 03 MINUTES 52 SECONDS WEST, A DISTANCE OF 371.64 FEET TO A POINT FOR CORNER;

SOUTH 70 DEGREES 20 MINUTES 29 SECONDS EAST, A DISTANCE OF 1004.43 FEET TO A POINT FOR CORNER ON THE NORTHWEST RIGHT-OF-WAY LINE OF TWIN OAKS DRIVE (A VARIABLE WIDTH RIGHT-OF-WAY) AND THE BEGINNING OF A NON-TANGENT CURVE TO THE LEFT HAVING A CENTRAL ANGLE OF 08 DEGREES 56 MINUTES 52 SECONDS, A RADIUS OF 560.00 FEET AND A LONG CHORD THAT BEARS NORTH 13 DEGREES 36 MINUTES 21 SECONDS WEST, A DISTANCE OF 87.37 FEET;

THENCE, CONTINUING OVER AND ACROSS SAID "TRACT 11" AND SAID BONNIE LUCILLE GENTRY ELEMENTARY SCHOOL ADDITION, THE FOLLOWING COURSES AND DISTANCES:

ALONG SAID NON-TANGENT CURVE TO THE LEFT, AN ARC DISTANCE OF 87.45 FEET TO A POINT FOR CORNER;

NORTH 18 DEGREES 04 MINUTES 47 SECONDS WEST, A DISTANCE OF 119.36 FEET TO A POINT FOR CORNER AND THE BEGINNING OF A TANGENT CURVE TO THE RIGHT HAVING A CENTRAL ANGLE OF 52 DEGREES 27 MINUTES 28 SECONDS, A RADIUS OF 640.00 FEET AND A LONG CHORD THAT BEARS NORTH 08 DEGREES 08 MINUTES 57 SECONDS EAST, A DISTANCE OF 565.71 FEET;

ALONG SAID TANGENT CURVE TO THE RIGHT, AN ARC DISTANCE OF 585.96 FEET TO A POINT FOR CORNER ON THE EAST LINE OF SAID BONNIE LUCILLE GENTRY ELEMENTARY SCHOOL ADDITION AND THE BEGINNING OF A NON-TANGENT CURVE TO THE LEFT HAVING A CENTRAL ANGLE OF 21 DEGREES 14 MINUTES 54 SECONDS, A RADIUS OF 225.00 FEET, AND A LONG CHORD THAT BEARS NORTH 66 DEGREES 33 MINUTES 45 SECONDS WEST, A DISTANCE OF 82.96 FEET;

THENCE, CONTINUING OVER AND ACROSS SAID "TRACT 11" AND ALONG THE NORTHEAST LINE OF SAID BONNIE LUCILLE GENTRY ELEMENTARY SCHOOL ADDITION, THE FOLLOWING COURSES AND DISTANCES:

ALONG SAID NON-TANGENT CURVE TO THE LEFT, AN ARC DISTANCE OF 83.44 FEET TO A POINT FOR CORNER;

NORTH 77 DEGREES 11 MINUTES 12 SECONDS WEST, A DISTANCE OF 34.92 FEET TO A POINT FOR CORNER AND THE BEGINNING OF A TANGENT CURVE TO THE RIGHT HAVING A CENTRAL ANGLE OF 55 DEGREES 43 MINUTES 56 SECONDS, A RADIUS OF 275.00 FEET AND A

LONG CHORD THAT BEARS NORTH 49 DEGREES 19 MINUTES 14 SECONDS WEST, A DISTANCE OF 257.07 FEET;

ALONG SAID TANGENT CURVE TO THE RIGHT, AN ARC DISTANCE OF 267.50 FEET TO A POINT FOR CORNER;

NORTH 21 DEGREES 27 MINUTES 16 SECONDS WEST, A DISTANCE OF 217.03 FEET TO A POINT FOR CORNER AND THE BEGINNING OF A TANGENT CURVE TO THE LEFT HAVING A CENTRAL ANGLE OF 23 DEGREES 43 MINUTES 19 SECONDS, A RADIUS OF 225.00 FEET AND A LONG CHORD THAT BEARS NORTH 33 DEGREES 18 MINUTES 55 SECONDS WEST, A DISTANCE OF 92.49 FEET;

ALONG SAID TANGENT CURVE TO THE LEFT, AN ARC DISTANCE OF 93.16 FEET TO A POINT FOR CORNER;

NORTH 45 DEGREES 10 MINUTES 34 SECONDS WEST, A DISTANCE OF 172.59 FEET TO THE NORTH CORNER OF SAID BONNIE LUCILLE GENTRY ELEMENTARY SCHOOL ADDITION, SAID POINT BEING ON THE NORTHWEST LINE OF SAID "TRACT 11" AND THE SOUTHEAST LINE OF AFORESAID CEDARBROOK ESTATES;

THENCE, NORTH 44 DEGREES 49 MINUTES 26 SECONDS EAST, A DISTANCE OF 1286.05 FEET TO THE NORTH CORNER OF SAID "TRACT 11" AND THE EAST CORNER OF SAID CEDARBROOK ESTATES, SAID POINT BEING ON THE SOUTHWEST RIGHT-OF-WAY LINE OF EAST CARTWRIGHT ROAD (A VARIABLE WIDTH RIGHT-OF-WAY);

THENCE, NORTH 46 DEGREES 02 MINUTES 28 SECONDS WEST, ALONG SAID SOUTHWEST RIGHT-OF-WAY LINE OF EAST CARTWRIGHT ROAD, A DISTANCE OF 1099.27 FEET TO A POINT FOR CORNER;

THENCE, NORTH 11 DEGREES 30 MINUTES 20 SECONDS EAST, OVER AND ACROSS SAID EAST CARTWRIGHT ROAD, PASSING AT A DISTANCE OF 142.21 FEET THE SOUTH CORNER OF LOT 1, BLOCK A OF DIVINE MERCY ADDITION, AN ADDITION TO THE CITY OF MESQUITE, AS RECORDED IN COUNTY CLERK'S FILE NO. 20070019482, MAP RECORDS, DALLAS COUNTY, TEXAS, CONTINUING OVER AND ACROSS AFORESAID 119.95 ACRE TRACT AND ALONG THE SOUTHEAST LINE OF SAID LOT 1, BLOCK A, IN ALL A TOTAL DISTANCE OF 519.53 FEET TO A POINT FOR CORNER;

THENCE, NORTH 26 DEGREES 06 MINUTES 30 SECONDS EAST, CONTINUING OVER AND ACROSS SAID 119.95 ACRE TRACT AND ALONG THE SOUTHEAST LINE OF SAID LOT 1, BLOCK A, A DISTANCE OF 754.65 FEET TO THE EAST CORNER OF SAID LOT 1, BLOCK A, SAID POINT BEING ON THE NORTHEAST LINE OF SAID 119.95 ACRE TRACT AND THE SOUTHWEST RIGHT-OF-WAY LINE OF MESQUITE VALLEY ROAD (A VARIABLE WIDTH RIGHT-OF-WAY);

THENCE, ALONG THE NORTHEAST LINE OF SAID 119.95 ACRE TRACT AND THE SAID SOUTHWEST RIGHT-OF-WAY LINE OF MESQUITE VALLEY ROAD, THE FOLLOWING COURSES AND DISTANCES:

SOUTH 45 DEGREES 56 MINUTES 29 SECONDS EAST, A DISTANCE OF 908.03 FEET TO A POINT FOR CORNER AND THE BEGINNING OF A TANGENT CURVE TO THE LEFT HAVING A CENTRAL ANGLE OF 42 DEGREES 01 MINUTES 25 SECONDS, A RADIUS OF 241.04 FEET AND A LONG CHORD THAT BEARS SOUTH 66 DEGREES 57 MINUTES 12 SECONDS EAST, A DISTANCE OF 172.85 FEET;

ALONG SAID TANGENT CURVE TO THE LEFT, AN ARC DISTANCE OF 176.79 FEET TO A POINT FOR CORNER;

THENCE, SOUTH 45 DEGREES 49 MINUTES 44 SECONDS EAST, CONTINUING ALONG SAID NORTHEAST LINE OF 119.95 ACRE TRACT, THE SOUTHWEST LINE OF CANTURA COVE ADDITION, PHASE II, AN ADDITION TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 2000-036, PAGE 2908, MAP RECORDS, DALLAS COUNTY, TEXAS AND THE SOUTHWEST LINE OF CANTARA COVE ADDITION, PHASE I, AN ADDITION TO THE CITY OF MESQUITE, AS RECORDED IN VOLUME 99211, PAGE 2763, MAP RECORDS, DALLAS COUNTY, TEXAS, OVER AND ACROSS AFORESAID 2.694 ACRE TRACT AND AFORESAID "TRACT 7", A DISTANCE OF 3014.74 FEET TO A POINT FOR CORNER ON THE NORTH RIGHT-OF-WAY LINE OF AFORESAID EAST CARTWRIGHT ROAD;

THENCE, NORTH 77 DEGREES 53 MINUTES 26 SECONDS EAST, OVER AND ACROSS SAID "TRACT 7" AND ALONG SAID NORTH RIGHT-OF-WAY LINE OF EAST CARTWRIGHT ROAD, A DISTANCE OF 193.18 FEET TO A POINT FOR CORNER AT THE SOUTH END OF A CORNER CLIP AT THE INTERSECTION OF SAID NORTH RIGHT-OF-WAY LINE OF EAST CARTWRIGHT ROAD AND THE SOUTHEAST RIGHT-OF-WAY LINE OF BEAR DRIVE (A VARIABLE WIDTH RIGHT-OF-WAY);

THENCE, NORTH 57 DEGREES 06 MINUTES 34 SECONDS WEST, CONTINUING OVER AND ACROSS SAID "TRACT 7" AND SAID CORNER CLIP, A DISTANCE OF 42.43 FEET TO A POINT FOR CORNER AND THE BEGINNING OF A NON-TANGENT CURVE TO THE RIGHT HAVING A CENTRAL ANGLE OF 59 DEGREES 50 MINUTES 26 SECONDS, A RADIUS OF 168.16 FEET AND A LONG CHORD THAT BEARS NORTH 14 DEGREES 28 MINUTES 28 SECONDS EAST, A DISTANCE OF 167.76 FEET;

THENCE, CONTINUING OVER AND ACROSS SAID "TRACT 7" AND ALONG SAID SOUTHEAST RIGHT-OF-WAY LINE OF BEAR DRIVE, THE FOLLOWING COURSES AND DISTANCES:

ALONG SAID NON-TANGENT CURVE TO THE RIGHT, AN ARC DISTANCE OF 175.63 FEET TO A POINT FOR CORNER;

NORTH 45 DEGREES 30 MINUTES 29 SECONDS WEST, A DISTANCE OF 1.85 FEET TO A NORTH CORNER OF A CALLED 6.647 ACRE TRACT OF LAND CONVEYED TO THE CITY OF MESQUITE, AS RECORDED IN COUNTY CLERK'S FILE NO. 200305302992, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS, SAID POINT BEING ON THE NORTHWEST LINE OF SAID "TRACT 7" AND SAID SOUTHEAST RIGHT-OF-WAY LINE OF BEAR DRIVE;

THENCE, NORTH 44 DEGREES 28 MINUTES 28 SECONDS EAST, ALONG SAID NORTHWEST LINE OF "TRACT 7", THE NORTHWEST LINE OF AFORESAID 2.06 ACRE TRACT AND SAID SOUTHEAST RIGHT-OF-WAY LINE OF BEAR DRIVE, A DISTANCE OF 579.38 FEET TO THE NORTH CORNER OF SAID 2.06 ACRE TRACT;

THENCE, SOUTH 45 DEGREES 32 MINUTES 20 SECONDS EAST, ALONG THE NORTHEAST LINE OF SAID 2.06 ACRE TRACT, THE NORTHEAST LINE OF SAID "TRACT 7" AND THE SOUTHWEST RIGHT-OF-WAY LINE OF SAID BEAR DRIVE, A DISTANCE OF 1252.87 FEET TO A POINT FOR CORNER IN AFORESAID EAST CARTWRIGHT ROAD;

THENCE, SOUTH 44 DEGREES 49 MINUTES 02 SECONDS WEST, PASSING AT A DISTANCE OF 48.23 FEET THE NORTH CORNER OF A CALLED 25.131 ACRE TRACT OF LAND CONVEYED TO WAL-MART REAL ESTATE BUSINESS TRUST, AS RECORDED IN COUNTY CLERK'S FILE NO. 201500177457, OFFICIAL PUBLIC RECORDS, DALLAS COUNTY, TEXAS, CONTINUING OVER AND ACROSS SAID "TRACT 7" AND ALONG THE NORTHWEST LINE OF SAID 25.131 ACRE TRACT, A TOTAL DISTANCE OF 1057.41 FEET TO A POINT FOR CORNER AND THE BEGINNING OF A TANGENT CURVE TO THE LEFT HAVING A CENTRAL ANGLE OF 90 DEGREES 00 MINUTES 00 SECONDS, A RADIUS OF 40.00 FEET AND A LONG CHORD THAT BEARS SOUTH 00 DEGREES 10 MINUTES 58 SECONDS EAST, A DISTANCE OF 56.57 FEET;

THENCE, ALONG SAID TANGENT CURVE TO THE LEFT, CONTINUING OVER AND ACROSS SAID "TRACT 7" AND ALONG SAID NORTHWEST LINE OF 25.131 ACRE TRACT, AN ARC DISTANCE OF 62.83 FEET TO A POINT FOR CORNER;

THENCE, SOUTH 45 DEGREES 10 MINUTES 58 SECONDS EAST, CONTINUING ALONG SAID NORTHWEST LINE OF 25.131 ACRE TRACT AND OVER AND ACROSS AFORESAID "TRACT 6", A DISTANCE OF 1044.83 FEET TO A POINT FOR CORNER IN THE APPROXIMATE CENTER LINE OF AFORESAID FAITHON P. LUCAS SR. BOULEVARD;

THENCE, SOUTH 44 DEGREES 19 MINUTES 48 SECONDS WEST, CONTINUING OVER AND ACROSS SAID "TRACT 6" AND WITH SAID APPROXIMATE CENTER LINE OF FAITHON P. LUCAS SR. BOULEVARD, A DISTANCE OF 268.94 FEET TO THE **POINT OF BEGINNING** AND CONTAINING A CALCULATED AREA OF 1424.398 ACRES, OR 62,046,765 SQUARE FEET OF LAND.

Exhibit B
Planned Development District Development Regulations

1. **Definitions.**

- a. Accessory dwelling unit means an accessory secondary living unit for SF-D3 or SF-D4 homes pursuant to Section 3(c)(iii) below.
- b. Alley means a publicly or privately owned access way that provides access to the rear of a lot and functions as a traditional alley.
- c. Concept Plan means the concept plan attached as **Exhibit C.**
- d. Front entry garage means a garage accessed from the street in front of a single family home or duplex. This term does not include side entry or j-swing garages.
- e. Open space means generally undeveloped property that can be used for active or passive recreation, is publicly or privately owned and maintained, is accessible by the residents of the Property or by the general public, and is designated as open space on an approved final plat. All landscape buffers will be treated as open space.
- f. Parks, Open Space, and Trail Plan means the plan attached as **Exhibit D.**
- g. PD Ordinance means the planned development zoning ordinance for the Property adopted on October 5, 2020 as Ordinance No. _____.
- h. Phase 1 Concept Plan means the conceptual plan for phase one of the development attached as **Exhibit C-1.**
- i. Property means the property described on **Exhibit A** of this PD Ordinance.
- j. Single family attached (townhome) means a single family dwelling on a separate lot that fronts on a street, a place, a court, or a private access easement, and that is attached to one or more single family dwellings by either a common wall or another structure that causes the attached dwellings to constitute an architectural whole or appear on the exterior to be a single building.
- k. Zoning Ordinance means the Mesquite Comprehensive Zoning Ordinance in effect on the date of the adoption of this PD Ordinance, as amended.

2. **Applicable Regulations; Amendments.**

- a. The base zoning district for areas shown on the Concept Plan for all residential uses shall be R Single Family. The base zoning district for areas shown on the Concept Plan for non-residential (i.e., the area identified as the "Center" on the Concept Plan) uses shall be GR General Retail. Section 2-502 of the Zoning Ordinance shall not apply to townhomes (single family attached).
- b. Property Owner Consent for PD Amendments. PD amendments are authorized for all or a portion of the land governed by this PD. With the exception of PD amendments initiated by the City, all requests to amend this PD shall only be

accompanied by the written consent of the owners of the property that is the subject of the amendment request, to the extent permitted by law as determined by the City Attorney. A request to amend or an amendment to a portion of the Property shall apply only to the property subject of the amendment request, unless otherwise provided by law.

3. Permitted Uses.

a. The following uses shall be permitted in the areas designated Residential, as shown in **Exhibit C.**

i. Single Family Detached (SF-D1, SF-D2, SF-D3, SF-D4)

- A. Conventional Dwellings
- B. Zero Lot Line Dwellings
- C. Patio Homes

ii. Single Family Attached (SF-A)

- A. Duplex Two-family Dwellings
- B. Townhouse Dwellings
- C. Other Attached Dwellings (3-plex, 4-plex)

iii. Accessory Uses and Structures.

- A. Accessory Structures (Private) (Including but not limited to buildings, garages, patio covers, decks, carports, fences, signs, swimming pools, spas, antenna, satellite dishes, game courts, flagpoles).
- B. Accessory Dwelling Unit as defined in this PD
- C. Home Occupations
- D. Leasing Office

iv. Non-Residential Uses

- A. Amenity Center¹
- B. Agricultural uses, including, but not limited to, raising crops and livestock, livestock services (including horses), and landscape/horticulture services. Agricultural uses are permitted at any location within the Property.

v. Temporary Residential Sales Office and Model Homes. A residential real estate sales office, located on a platted lot, may be permitted within a subdivision for which building permits have been issued and may be located either in a model home, in a temporary building, or in a portable trailer. Model homes are permitted within a subdivision for which building permits have been issued. A permit for a temporary residential sales office or a model home may be issued for no more than one year, but may be extended if the builder maintains active and continuous sales or construction activities within the subdivision and a minimum of five lots in the subdivision remain unsold. Such sales office shall

¹ An amenity center shall follow the same requirements for a non-residential development in the GR Zoning District with regard to parking and landscaping. Screening for non-residential uses permitted in residential districts shall apply per Section 1A-303A.4 of the Zoning Ordinance. The developer may designate which amenities in the amenity center area of the Concept Plan are private versus open to the public.

be used for sales in the subject subdivision only and not for sales in any other subdivision.

- b. All uses permitted in the GR, General Retail District are allowed in the areas designated as “Center” as shown in **Exhibit C** except as modified in paragraphs "i" and "ii" of this subsection. The uses permitted in the GR District are subject to the same requirements applicable to the uses in the GR District, as set out in the Zoning Ordinance. For example, a use permitted in the GR District only by conditional use permit (“CUP”) is permitted in this district only by CUP.

- i. The following uses are prohibited:

SIC Code 533	Variety Stores
SIC Code 5993	Tobacco Stores
SIC Code 5947	Gift, Novelty, Souvenir Shops
SIC Code 753	Automobile Repair Shops
SIC Code 7549	Automotive Diagnostic, Inspection

- ii. The following uses are permitted by right:

SIC 074c	Outdoor services to household pets (including any service with outdoor kennels or activity)
SIC Code 549	Indoor and Outdoor Farmers Market ²
SIC Code 5812	Eating Places (excluding drive-in restaurants, drinking place with private club, and private club in conjunction with a full-service hotel)
SIC Code 5812	Restaurant holding a Food & Beverage Certificate with Private Club

Beer and wine sales in connection with a retail use.

- c. Accessory uses including, but not limited to, the following accessory uses are permitted:

- i. Accessory private community center is permitted as an accessory use to an amenity center. An accessory private community center may include a restaurant open to members and their guests and may include a banquet

² An indoor or outdoor farmers market is permitted within the area labeled the "Center" on the Concept Plan or within Heritage Park. This use may include the following types of retail sales: the sale of fruit, vegetables or other produce; the sale of herbs, spices, seeds, or nuts; the sale of meat, fish, eggs, dairy products, honey, or other animal products; the sale of baked goods; the sale of any other food or beverage products; the sale of farm product raw materials; the sale of flowers, plants or nursery stock, or florist supplies; the sale of gifts; the sale of books, used or new; the sale of art, crafts, or similar handmade or homemade goods; and the sale of antiques or collectibles; and the sale of other similar products commonly sold in a farmers market by a collection of individual vendors.

facility that may be rented for special occasions, such as wedding receptions and parties.

- ii. Accessory short-term rentals are permitted as an accessory use to an amenity center in the area labeled as the "Center" on the Concept Plan. Short term rentals are not required to be attached to, or located on the same lot as, the amenity center, and may be developed in a separate phase following development of an amenity center. A short-term rental is defined as a lodging use that offers a rental for less than 30 consecutive days to any individual, and which may include a maximum of 750 square feet in floor area and a maximum of two bedrooms and bathrooms, a living room, a kitchenette, and a washer and dryer. Units may be attached or detached. A maximum of 20 units may be rented as part of an accessory short-term rental use in connection with an amenity center. The purpose of this accessory use is to provide short term rentals for family members and guests of residents within the PD. The short-term rental units must be on a lot that is located within 300 feet of the amenity center lot. A minimum of 1.5 parking spaces shall be provided for each short-term rental unit; however, a short-term rental use may share parking with the amenity center (meaning the amenity center parking spaces may be used to satisfy short-term rental unit parking requirements), and on-street parking may be counted to satisfy parking requirements for short-term rentals and the amenity center. Accessory short-term rentals are not subject to the city's hotel registration requirements.
- iii. For SF-D3 and SF-D4 homes, an attached accessory secondary living unit, not to exceed 750 square feet in floor area, may be located on the same lot as the principal use. An accessory secondary living unit is limited to having a maximum of two bedrooms and one bathroom, a living room, a kitchenette, and a washer and dryer. The occupants shall be part of the same family that occupies the principal use or shall be a caregiver for one or more family members that occupy the principal use. Accessory secondary living units shall not be rented as separate living units. For purposes of this provision, a family is defined as individuals living together as a single housekeeping unit, including cooking together, in which not more than four individuals are unrelated by blood, marriage, or adoption. Family shall not include groups of individuals which do not function as or constitute housekeeping units, such as boarding/ lodging houses, fraternity/sorority houses, and similar living arrangements. One additional off-street parking space shall be provided. A separate meter is permitted, but not required, for the accessory secondary living units.
- d. Development of the Property shall be in general conformance with the Concept Plan attached as **Exhibit C**. The Phase 1 Concept Plan attached as **Exhibit C-1** is conceptual and subject to change, and has been provided for illustrative purposes only. The street network shown on the Concept Plan is conceptual and subject to change at the time of final design and platting. The owner may change the boundaries and area of any undeveloped areas on the original Concept Plan by up to a cumulative amount of 25 percent for each land use area. The area labeled as the "Center" on the Concept Plan

may be developed with any use that is permitted by right in this PD, and the use of areas shown in the "Center" on the Concept Plan will be indicated on the plat(s) for the "Center." Any change to the Concept Plan must be submitted to the Director of Planning and Development to ensure compliance with this paragraph, and the amended Concept Plan will become a part of the permanent file maintained by the Director of Planning and Development for this PD.

- e. Planned Development (PD) Site Plan Approval. The PD site plan review and approval procedures shall follow the requirements in Section 4-200 of the Zoning Ordinance, as amended.

4. Development Standards. See Exhibit E, which contains the exclusive lot size, setback, lot coverage, density, garage orientation, building height, and dwelling unit size requirements for residential development. Exhibit F illustrates the residential product types described on Exhibit E. For non-residential development, the lot size, setback, lot coverage, and building height regulations of the GR, General Retail zoning district shall apply. The following requirements shall apply:

- a. Repetition of Elevations for Single Family Detached Uses and Duplexes. Single family detached homes and duplexes shall comply with the anti-repetition requirements on Exhibit G. At least 10 percent of an elevation must be different, or it will be considered to be a repeated elevation.
- b. Single Family Attached Sound Attenuation. When single family attached uses share a common wall, the common wall shall have a minimum Sound Transmission Class (STC) rating of 60.
- c. Except as otherwise provided below in paragraphs (i) and (ii), chain link, barbed wire, pipe, vinyl, and razor wire fences are prohibited:
 - i. This restriction does not apply to temporary construction fencing, fencing around a lift station or other utility uses, barbed wire fencing around cattle or other agricultural uses. The Director of Planning and Development may permit these materials for limited use in other specific circumstances if the Director finds the use of these materials to be appropriate.
 - ii. Vinyl fencing and manufactured fencing materials are permitted on residential lots.
 - iii. Vinyl coated chain link fencing is permitted in connection with a dog park.
- d. Pedestrian Connectivity. When a blockface developed with non-residential uses exceeds 500 feet in length, pedestrian access through the block shall be provided. Such access may be provided through a pedestrian access easement, a business open to the public, or any other means that provides pedestrian access during regular business hours.
- e. Accessory Buildings. An accessory building shall comply with the standards in Section 2-600 of the Mesquite Zoning Ordinance.

- f. Enhancements on Corner Lots. Each corner lot with a single family detached home shall have landscape enhancements along the side street as follows: at least two minimum three-inch caliper trees shall be planted per lot within the parkway, and a minimum of one evergreen shrub that is a minimum of five gallons shall be planted every five feet on center along fence lines facing the side street. Trees shall not block stop signs and shall not be planted within 35 feet of a street intersection. When trees are planted within the parkway, there shall be a minimum of five feet between the curb and sidewalk.
- g. Each single family detached home shall be serviced by a central cluster mailbox located at a street intersection as approved by the US Postal Service.
- h. All streets shall have upgraded street lights that shall be architecturally compatible with the overall theme of the PD.

5. Use of Right-of-Way. For improvements in the right-of-way, a permit must be obtained pursuant to Section 15-195 of the city code. The master developer and Homeowners Association may use the public right of way within the Property boundaries for the exclusive purpose of constructing, operating, repairing and maintaining the following improvements and any improvements reasonably related thereto or necessary for the operation thereof: street and pedestrian lighting, public seating areas, landscaping and related amenities, including fountains, monuments, statues, or other public artwork, street furniture, including benches, drinking fountains, trash containers, tunnels; security cameras, bollards, temporary construction barricades, underground duct banks, pedestrian bridges and overpasses, arches, string lighting or other decorative lighting, and wiring. The Director of Public Works may authorize additional items (other than those enumerated in this paragraph) to be included in the right-of-way if such items do not interfere with the public use of the right of way. The removal of improvements for maintenance and replacement of utilities, pavement, drainage structures, and sidewalks shall be at the permit holder's expense.

6. Garage Standards and Parking. The following requirements apply to single family homes:
- a. The front most portion of a front entry garage shall not extend more than three feet in front of the front facade or the front porch of a single family detached home or duplex.
 - b. All rear entry garage doors must be a minimum of 20 feet from the edge of the right-of-way. All side and front entry garage doors must be a minimum of 22 feet from the edge of the right-of-way.
 - c. Each single family detached home shall have a minimum of two enclosed garage parking spaces. Each single family attached home and duplex dwelling unit shall have a minimum of one enclosed garage parking space and one additional parking space. All residences shall have at least two parking spaces located behind the building line.
 - d. Required visitor parking for rear entry townhomes may be provided on-street.

- e. Visitor parking for paseo homes and cluster homes is permitted, but not required.
- f. Front entry garage doors shall be recessed a minimum of six inches into the building facade in which they are located.
- g. Minimum parking requirements for a paseo home may be satisfied by one enclosed parking space and one unenclosed parking space.

7. Landscaping and Screening.

- a. Tree plantings within parkways and medians, as well as in easements, shall follow the approved planting list located in the Engineering Design Manual or a species specifically permitted herein, and may not be planted directly above utilities.
- b. No single tree species shall constitute more than 25 percent of the trees located in parkways and medians.
- c. Shade trees are permitted in medians that are 10 feet or greater in width.
- d. Trees are not required to be planted a minimum of five feet from the back of curb.
- e. Berms, shrubs, trees, and groundcover are permitted in medians.
- f. Required shade trees may include sycamores, elms, ash, and red cedars, whether located in the parkway, in medians, or on private property.
- g. Required ornamental trees may include Deciduous Holly and Dogwood, whether located in the parkway, in medians, or on private property.
- h. Required shrubs may include Loropetalum, and Abelia Sherwoodii.
- i. Required groundcover may include Prostrate Rosemary and Bar Harbor Juniper, as well as artificial turf.
- j. Drought tolerant species of trees, shrubs, and groundcover that are not on the approved planting list located in the Engineering Design Manual may be approved by the Director of Planning and Development for use in the parkway or medians and on private property.
- k. No screening shall be required between different types of land uses that are located internal to the PD provided that a parking screen is installed pursuant to Section 1A-301.B.3 of the Zoning Ordinance when a non-residential use is adjacent or across the street from the front of a residential use.
- l. No landscaped buffer is required along an arterial or a collector street, but screening along arterial roadways is required in accordance with the screening requirements of the Zoning Ordinance. In the alternative, screening for arterial roadways may be provided in the form of (i) a concrete panel wall meeting the requirements in the Engineering Design Manual, or (ii) an ornamental metal fence with living screening in accordance with Section 1A-305A of the Zoning Ordinance, including masonry columns every 35 feet. Screening along collector streets is required in the form of

a minimum six-foot tall board on board fence with the finished side facing the street, which shall be constructed by the home builder and shall have consistent materials and a consistent design along all collector streets.

- m. A minimum of one three-inch caliper ornamental or canopy tree, or three eight-foot tall ornamental trees, shall be planted for every 50 linear feet of street frontage or fraction thereof along perimeter arterial and collector streets in the parkway. Trees may be planted in clusters to create a natural appearance along perimeter arterial and collector streets.
- n. A minimum of one three-inch caliper ornamental or canopy tree shall be planted on each residential lot or in the adjacent parkway, except that on each residential lot that is larger than 60 feet in width, a minimum of two three-inch caliper ornamental or canopy trees shall be planted. If insufficient space is available on a townhome lot or the adjacent parkway, the Director of Planning and Development may approve the tree to be located in a park or other public space within the same townhome phase of development.
- o. Boulders are a permitted landscaping material that may be placed in landscaped areas.

8. Tree Preservation. Trees shown within the preservation area on the tree preservation plan attached as **Exhibit H** shall be required to be preserved, which shall satisfy all tree preservation and mitigation requirements for the property in this PD.

9. Parks and Open Space.

- a. Parks and open space areas shall be designated on approved plats and shall generally comply with the Parks, Open Space, and Trail Plan attached as **Exhibit D**. The locations of trails shown on **Exhibit D** is conceptual and subject to modification at the time of final design and platting.
- b. A minimum of 40 percent of the property in this PD shall be preserved as open space as shown on the Parks, Open Space, and Trail Plan. Separate open space requirements in the zoning ordinance, such as those based on land use, shall not apply.
- c. Trails will be constructed in phases with each plat. As each phase of the project is platted, any portion of a trail required within the platted phase shall be completed with the other improvements required as part of the plat approval, and if a gap in trail connections is less than 1,000 feet, the connection shall be constructed with the platted phase under construction (otherwise, the connection shall be constructed with the completion of the next phase adjacent to the gap).
- d. Maintenance of parks, open space, and trails shall be in accordance with the Parks, Open Space, and Trail Plan, which indicates the party responsible for maintenance of each component of the plan, or as otherwise provided in a maintenance agreement between the developer or HOA and the city. Floodplain areas may be maintained, and may be used for crops and other agricultural uses, dog parks, and

other similar uses. The floodplain shall be maintained by the owner of the lot or the HOA in the condition that is included in the approved floodplain model.

- e. The following amenities are required to be started prior to the issuance of the Certificate of Occupancy or final inspection for the 100th single family attached or detached residence within the Property and completed within 36 months after the City's final acceptance of the first platted phase of the "Public Improvements" as defined in the Development Agreement between the developer and the City dated October 5, 2020:
 - i. An amenity center with the following:
 - A. a minimum 9,000 square foot community building;
 - B. a minimum 1,200 square foot fishing building; and
 - C. a minimum 3,000 square foot indoor fitness facility;
 - ii. A pool complex with one junior Olympic-sized lap pool, one resort pool, one adult pool, and one tot pool with splash toys;
 - iii. A minimum of one playground;
 - iv. A covered community outdoor gathering space;
 - v. A minimum of one shade structure, two picnic tables, and two park benches for each active park (i.e., a park with playground equipment, sports field, or other similar facilities for activity);
 - vi. A minimum of two dog waste stations;
 - vii. Trash cans; and
 - viii. Park signage.
- f. The developer shall, at a minimum, construct the following amenities within open space by the time the Building Official approves the final inspection or the certificate of occupancy for the 200th dwelling unit within this planned development:
 - i. A minimum of one play structure (such as climbers, hangers, slides or spinners);
 - ii. A minimum of two picnic tables and two park benches for each active park (i.e., a park with playground equipment, sports field, or other similar facilities for activity);
 - iii. A minimum of one dog waste station;
 - iv. Trash cans;

- v. Park signage; and
 - vi. A minimum of one shade structure per park.
 - g. Open space amenities not specifically listed above, but of a similar type and nature to those listed above, are permitted.
 - h. Except as otherwise provided in this paragraph, every dwelling unit shall be located within 0.25 miles of a park or useable open space that includes a community trail system with a minimum width of six feet, as generally shown on the Parks, Open Space, and Trail Plan. For purposes of this paragraph, useable open space is any open space that can be used by residents and is improved with any of the following: outdoor seating, playground equipment, a dog park, a play structure, a picnic table, a park bench, a dog clean up station, or a trail. The Director of Planning and Development has authority to allow a phase of homes to be constructed without meeting the requirements in this paragraph provided the subsequent plat will include the park or useable open space, including a community trail system with a minimum width of six feet, as generally shown on the Parks, Open Space, and Trail Plan, necessary to serve the prior phase of homes.
 - i. Trails shall be constructed of concrete and follow standards of the Engineering Design Manual.
 - j. Subject to all applicable laws and permit requirements, lakes may be recharged from rain collection and wells.
 - k. Open space areas shall be landscaped with one tree that is a minimum of three inches in caliper for every 35 feet of street frontage or fraction thereof. Trees may be planted in clusters to create a natural appearance. Where feasible, the developer shall transplant native trees from areas scheduled for developmental impact to open space areas and parks within the Property.
 - l. The requirements of this Section 9 are the exclusive requirements for parks and open space, and no other park land dedication, park fee, or park improvement requirements shall apply to the Property.
10. Street Sections. Non-standard street sections are permitted as shown on **Exhibit I**. Minimum median width may be ten feet.
11. Signage.
- a. Street signs shall be maintained by the developer or HOA until subdivision is accepted by the City or if damaged by construction activities. Additional sign equipment shall be provided to the City for immediate maintenance after acceptance.
 - b. Any alternative street signs shall be the standard color and have the standard text size required for city street signs. Alternative sign packages for private signs and street signs shall be reviewed and approved by city staff and must follow the Manual on Uniform Traffic Control Devices (MUTCD).

12. Miscellaneous.

- a. Front entry and rear entry (alley-served) residential types are permitted. Front entry garages for detached single family homes with a lot width of 49 feet or less are restricted to lots that back to a landscape buffer or other open space or a school site. Front entry garages are permitted without restriction for single family detached homes with a lot width greater than 49 feet and townhomes.
- b. The approved traffic study may be required to be updated after the Building Official approves the final inspection or the certificate of occupancy of each phase of development 500 dwelling units or combination of phases exceeding 500 dwelling units; however, no more than three updates to the approved traffic study may be required. The scope of all future traffic impact study updates shall be limited to impacts on the portion of Lucas Boulevard or E. Cartwright Road located within the PD boundaries.
- c. No vehicular connection shall be made from the Property to Milam Road.

Exhibit C-1
Phase 1 Concept Plan³



³ This exhibit is conceptual, subject to change, and provided for illustrative purposes only.

Exhibit D Parks, Open Space, and Trail Plan

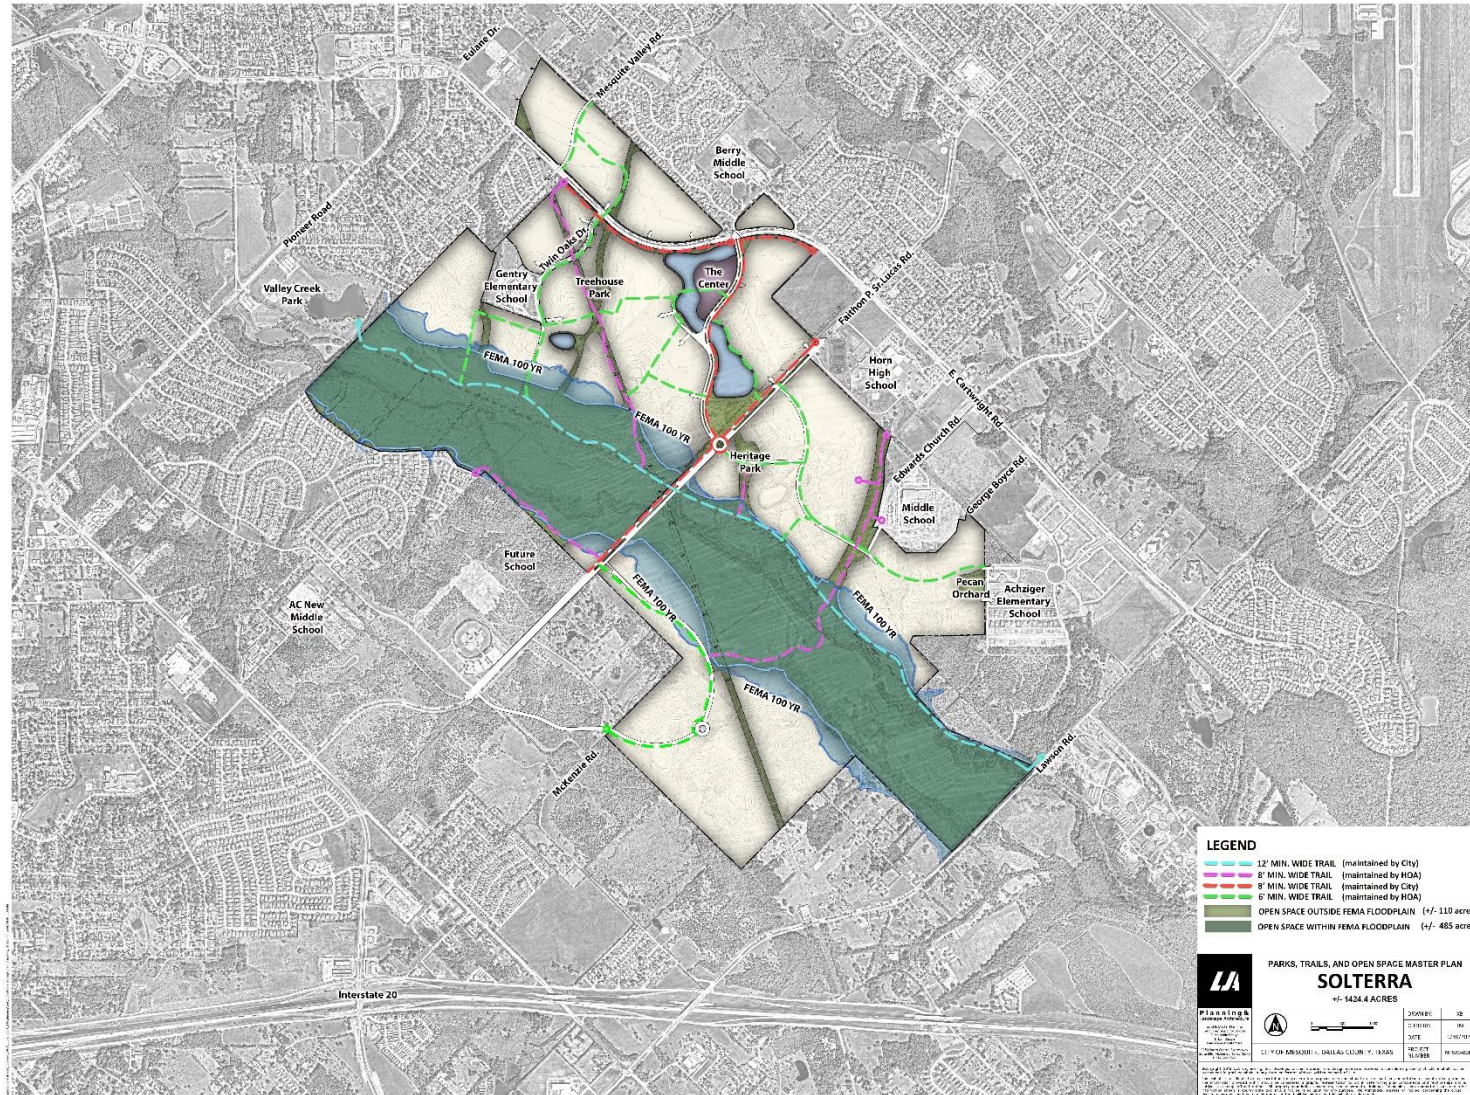


Exhibit E
Development Standards Table

Residential Type	Examples of Residential Type*	Minimum Lot Area (SF)	Minimum Lot Width (ft)	Minimum Lot Depth (ft)	Maximum Number of Stories	Garage Orientation	Max Density Based on Gross Acre	Minimum Front Yard Setback (ft)**	Minimum Interior Side Yard Setback (ft)	Minimum Corner Side Yard Setback (ft)	Minimum Rear Yard Setback (Home)	Maximum Lot Coverage (%)	Minimum Dwelling Unit Size (SF)	Special Conditions
SF-A	Single Family Attached (villa homesites)	1400	20	70	2	Alley	15	12	0	10	5	80	1200	Attached garage product
SF-A	Single Family Attached (villa homesites)	1600	20	80	2	Front	15	20	0	10	5	80	1200	Attached garage product
SF-A	Single Family Attached (villa homesites)	1600	20	80	2	Alley	15	12	0	10	5	80	1200	Detached garage product
SF-A	Duplex Triplex 4-Plex	8000	80	100	2	Alley	12	12	5	10	5	80	1100	
SF-D1	Single Family Detached (garden homesites) (cluster home)	2100	30	70	2	Alley	13	12	5	10	5	80	1200	Except for zero lot line types where 10' minimum side setback is required on one side and zero feet on the other. As an alternative, one side yard may be a minimum of 3 feet

														if the other side yard is a minimum of 7 feet.
SF-D1	Single Family Detached (paseo homesites) (cluster home)	2100	30	70	2	Alley	13	12	5	10	5	80	1250	Except for zero lot line types where 10' minimum side setback is required on one side and zero feet on the other. As an alternative, one side yard may be a minimum of 3 feet if the other side yard is a minimum of 7 feet.
SF-D1	Single Family Detached (cottage homesites) (cluster home)	3150	35	90	2	Alley	13	12	5	10	5	75	1250	Except for zero lot line types where 10' minimum side setback is required on one side and zero feet on the other. As an alternative, one side yard may be a minimum of 3 feet if the other side yard is a minimum of 7 feet.
SF-D1	Single Family Detached (chalet homesites)	4000	40	100	2	Side	6	20	5	10	5	75	1500	Except for zero lot line types where 10' minimum side setback is required on one side and zero feet on the other
SF-D1	Single Family Detached (chalet homesites)	4000	40*	100	2	Front	6	20	5	10	5	75	1500	Except for zero lot line types where 10' minimum side setback is required

														on one side and zero feet on the other. *Product type only allowed when rear yard is adjacent to open space.
SF-D1	Single Family Detached (chalet homesites)	4000	40*	100	2	Alley	6	12	5	10	5	75	1500	Except for zero lot line types where 10' minimum side setback is required on one side and zero feet on the other. *
SF-D2	Single Family Detached (courtyard homesites)	4000	50	80	2	Alley	8	12	5	10	5	80	1750	Except for zero lot line types where 10' minimum side setback is required on one side and zero feet on the other
SF-D2	Single Family Detached (executive homesites side drive: attached/detached garage)	5000	50	100	2	Side/Alley	5	12	5	10	5	75	1750	Except for zero lot line types where 10' minimum side setback is required on one side and zero feet on the other
SF-D2	Single Family Detached (executive homesites front loaded)	5000	50	100	2	Front	5	20	5	10	5	75	1750	Except for zero lot line types where 10' minimum side setback is required on one side and zero feet on the other
SF-D3	Single Family Detached (manor homesites)	6000	60	100	2	All	4	12	5	10	5	75	2000	Garage setback is subject to Section 6(b) of the PD

SF-D4	Single Family Detached (chateau homesites)	7000	70	100	2	All	3.5	12	5	10	5	75	2400	Garage setback is subject to Section 6(b) of the PD
-------	--	------	----	-----	---	-----	-----	----	---	----	---	----	------	---

*Exhibit E includes drawings illustrating each residential type for illustrative purposes only. Homes are not required to be designed as illustrated.

**The minimum front yard setback for all rear entry homes shall be 12 feet.

Notes:

All rear entry garage doors must be a minimum of 20 feet from the edge of the right-of-way. All side and front entry garage doors must be a minimum of 22 feet from the edge of the right-of-way.

When the rear yard of a front entry single family residential lot is contiguous to the lot line of a developed single family residential lot located outside the PD boundaries, a minimum rear yard building setback of 25 feet shall be required.

A maximum of 3,900 residential lots is permitted within the boundaries of this PD. The number and type of each residential lot approved by plat shall be tracked on each site plan submittal to confirm compliance with the minimum and maximum percentages of each lot type in the chart above.

Development of the Property shall comply with the following tables at full buildout and in phase one, as applicable, unless the Director of Planning authorizes minor modifications to the percentages in these tables:

Full Build-out Lot Count Table

Product	Percentage
SF-A	15% maximum
SF-D1	30% maximum
SF-D2	60% maximum
SF-D3	8% minimum
SF-D4	2% minimum

Phase One Lot Count Table

Product	Percentage
SF-A	15% maximum
SF-D1	40% maximum
SF-D2	60% maximum
SF-D3	8% minimum
SF-D4	2% minimum

Exception to minimum setback: Minimum side setback to detached garages or accessory buildings may be reduced to three feet when a greater setback would otherwise be required.

Permitted encroachments into setbacks: porches (up to eight feet into front yard setback and corner side yard setback, provided, however, no less than a 12-foot setback from the property line shall be permitted on any lot that requires a 12-foot or larger front yard setback); fireplaces and box windows up to two feet into all setbacks; balconies, awnings, overhang eaves up to two feet into all setbacks); bay windows up to four feet into front and rear yard setbacks; stoops and stairs up to five feet into front and rear yard setbacks; suspended planter or flower boxes up to 24 inches into all setbacks; and foundation encroachments of up to six inches in all setbacks for architectural details such as brick ledges. Swimming pools shall have a minimum five-foot setback from rear and side property lines; however, such setback only applies to the swimming pool, and not to associated decking or paving around a swimming pool.

Plats for zero lot line homes shall designate the side with the zero-foot setback and the side with the ten foot setback. A five-foot maintenance easement shall also be provided along the lot line adjacent to a neighboring lot's zero setback side. The maintenance easement shall include a drainage easement to allow for lot-to-lot drainage.

A maximum of eight single family attached units may be attached without a building separation.

Exhibit F
Illustrations of Residential Types


Villa Homesites are attached housing types frequently used for transition between urban multifamily and single family. Each unit is located on a separate platted lot.

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory buildings maybe reduced to 3' when greater setback would be otherwise required.

HOUSING TYPE ELEMENTS

- Lot Area: 1,400 SF min.
- Lot Width: 20' min.
- Lot Depth: 70' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley
- Maximum Density: 15 du/ac.
- Min Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 0'
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 20'
- Maximum Lot Coverage: 80%
- Minimum Dwelling Unit Size: 1,200 SF

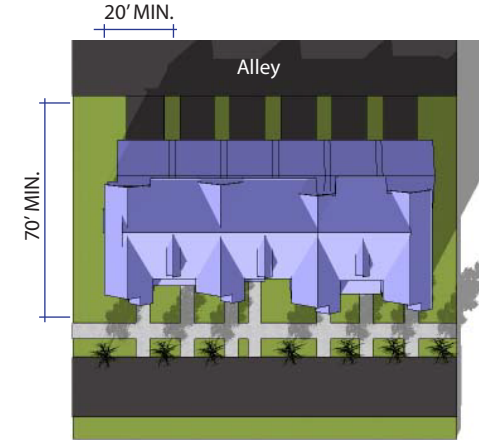

Plan: group of Villa Homesites Standard, Attached garage.



View: Group of Villa Homesites Standard, attached garage.



All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

Villa Homesites are attached housing types frequently used for transition between urban multifamily and single family. Each unit is located on a separate platted lot.

HOUSING TYPE ELEMENTS

- Lot Area: 1,600 SF min.
- Lot Width: 20' min.
- Lot Depth: 80' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Front
- Maximum Density: 15 du/ac.
- Min. Front Yard Setback: 20'
- Minimum Interior Side Yard Setback: 0'
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 22'
- Maximum Lot Coverage: 80%
- Minimum Dwelling Unit Size: 1,200 SF

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory buildings maybe reduced to 3' when greater setback would be otherwise required.

ALLOWED ENCROACHMENT INTO SETBACK

- Porches (up to 8' in a front setback and corner side yard setback)
- Fireplace and Box windows (up to 2' into all setbacks)
- Balconies, Awnings, Overhang Eaves (up to 2' into all setbacks)
- Bay windows (up to 4' into front and rear setbacks;
- Stoops and Stairs (up to 5' into front and rear setbacks)
- Suspended planter/flower boxes up to 24" into all setback
- Foundation encroachments of 4"-6" are allowed for architectural details such as brick ledges



Plan: group of Villa Homesites Standard, Front Entry.



View: Group of Villa Homesites Standard, detached garage.


Villa Homesites are attached housing types frequently used for transition between urban multifamily and single family. Each unit is located on a separate platted lot.

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory buildings maybe reduced to 3' when greater setback would be otherwise required.

HOUSING TYPE ELEMENTS

- Lot Area: 1,600 SF min.
- Lot Width: 20' min.
- Lot Depth: 80' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley
- Maximum Density: 15 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 0'
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 20'
- Maximum Lot Coverage: 80%
- Minimum Dwelling Unit Size: 1,200 SF

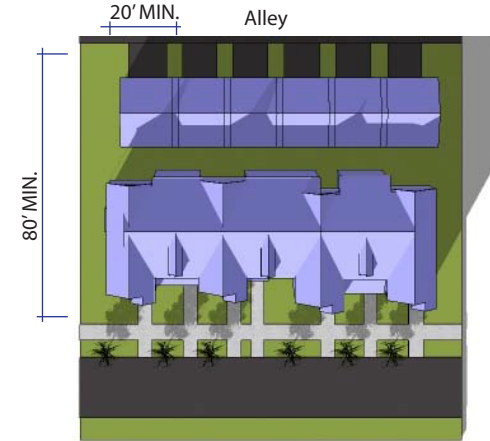

Plan: group of Villa Homesites Standard, Detached garage.



View: Group of Villa Homesites Standard, detached garage.




All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

Zero lot detached residential have no setback/zero side setback on one side of the home to allow for other side to be used entirely as a side yard. The zero lot detached residential will have min. 10' setback/ easement one side. Zero Lots are allowed in the following building types.

- 1) Garden Homesite
- 2) Paseo Homesite
- 3) Courtyard Homesite
- 4) Cottage Homesite
- 5) Chalet and Executive Homesite - Alley Loaded and Side Drive only (attached and detached garage).

The illustrations below show a generic zero lot condition for alley side drives. Please refer to the appropriate building for lot widths, lot depths, size and front setback standards and allowed garage orientation. All drawings and dimensions not to scale.

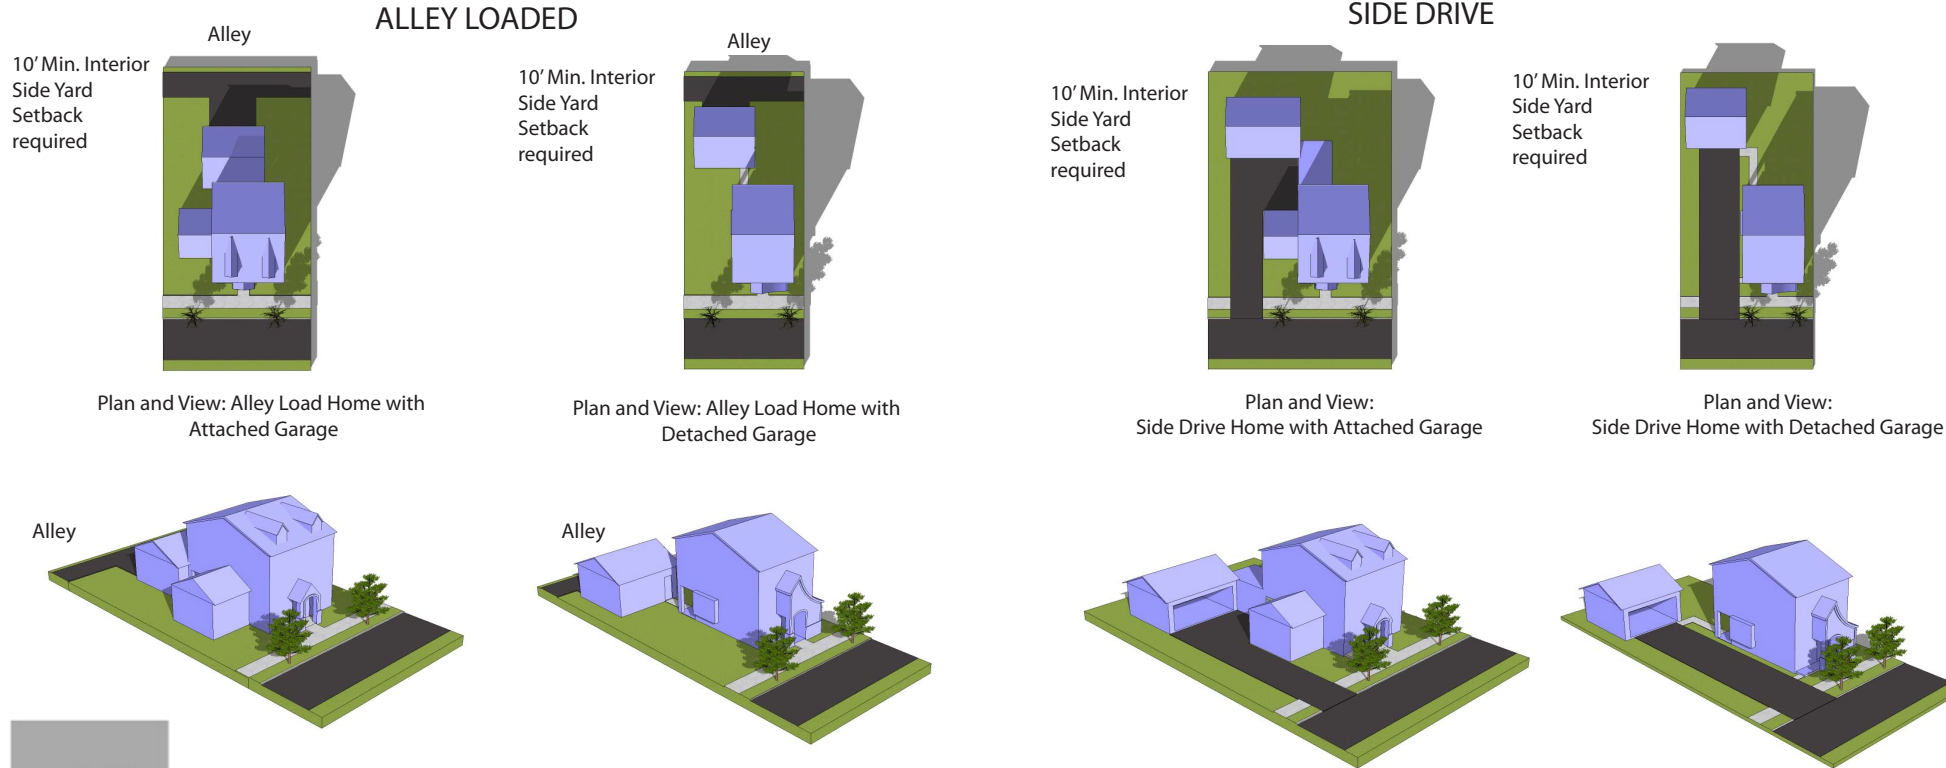

All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

The Garden Homesite is a block type in which alley-fed small single family lots are arranged around a common green. The cluster with its depth of no more than 160' should have at least one public street along the green. A common walkway along the green serves all lots. This type has proven to be a very popular option, especially for couples, young families, and empty nesters. The shared green provide safety for younger children and a park like atmosphere in which to play without crossing any streets, the court-facing homes allow for easy supervision by parents or community members. All the homes face a common green space and parking must be accessed from alleys.

HOUSING TYPE ELEMENTS


- Lot Area: 2,100 SF min.
- Lot Width 30' min (40' min. on corner lots)
- Lot Depth: 70' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley, 2 spaces
- Maximum Density: 13 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5' (except for Zero Lot Line Types where 10' min. side setbacks is required on one side one 0' on the other)
- Minimum Corner Side Yard Setback: 10'

HOUSING TYPE ELEMENTS - CONT.


- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 20'
- Maximum Lot Coverage: 80%
- Minimum Dwelling Unit Size: 1,200 SF

EXCEPTIONS TO MINIMUM SETBACK:


Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other. As an alternative, one side yard may be a minimum of 3 feet if the other side yard is a minimum of 7 feet.

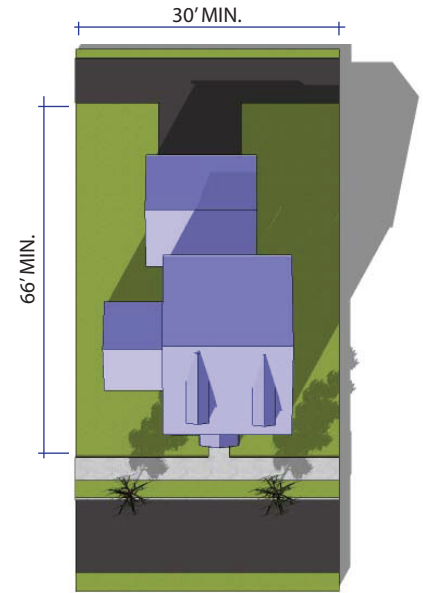

Plans: Individual Garden Homesite

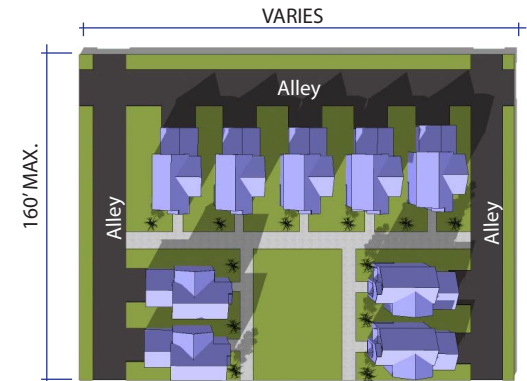

Plan: Garden Homesite cluster

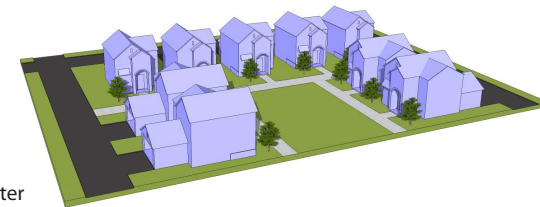

View: Garden Homesite cluster



All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.


Paseo Homesites are a block type in which alley served small single family lots are arranged on both sides of a linear common green. The Paseo which is typically not deeper than 300', should connect two public streets and the units are served by a common walkway along the paseo.

EXCEPTIONS TO MINIMUM SETBACK:

Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other. As an alternative, one side yard may be a minimum of 3 feet if the other side yard is a minimum of 7 feet.

HOUSING TYPE ELEMENTS

- Lot Area: 2,100 SF min.
- Lot Width: 30' min.
- Lot Depth: 70' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley, 2 spaces
- Maximum Density: 13 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5' (except for Zero Lot Line Types where 10' min. side setbacks is required on one side one 0' on the other)
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 20'
- Maximum Lot Coverage: 80%
- Minimum Dwelling Unit Size: 1,250 SF

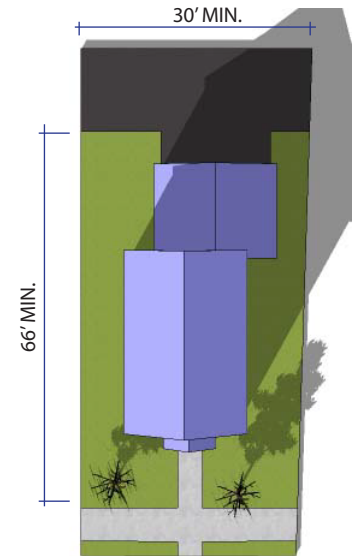

Plans: Individual Paseo Homesite



Plan: Paseo Homesite cluster



View: Paseo Homesite cluster



All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.


Cottage Homes appeal to individuals and families who desire single-family units with limited yard maintenance.

HOUSING TYPE ELEMENTS


- Lot Area: 3,150 SF min.
- Lot Width: 35' min.
- Lot Depth: 90' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley, min 2 spaces
- Maximum Density: 13 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5' (except for Zero line Types where 10' min. side setbacks is required on one side and 0' on the other)
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 20'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 1,250 SF

EXCEPTIONS TO MINIMUM SETBACK:

Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other. As an alternative, one side yard may be a minimum of 3 feet if the other side yard is a minimum of 7 feet.

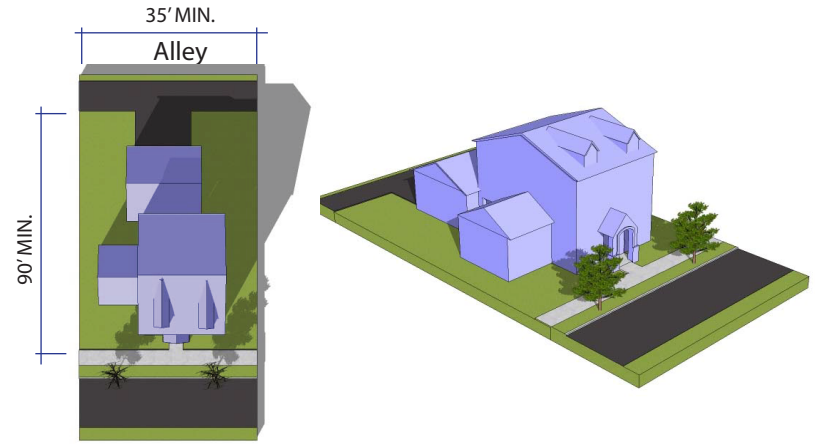

View and Plan: Alley Load Chalet Home with Attached Garage

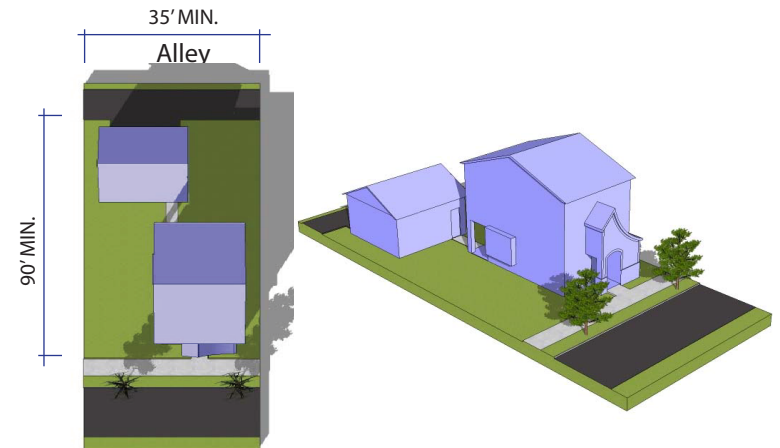

View and Plan: Alley Load Chalet Home with Detached Garage



All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

Chalet Homes appeal to individuals and families who desire single-family units with limited yard maintenance.

HOUSING TYPE ELEMENTS



- Lot Area: 4,000 SF min.
- Lot Width: 40' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Side Drive, 2 spaces
- Maximum Density: 6 du/ac.
- Minimum Front Yard Setback: 20'
- Maximum Interior Side Yard Setback: 5' (except for Zero lot line types where 10 min. side setback is required on one side and 0' on the other)
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 20'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 1,500 SF

EXCEPTIONS TO MINIMUM SETBACK:



Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other.

ALLOWED ENCROACHMENT INTO SETBACK

- Porches (up to 8' into front setback and corner side yard setback)
- Fireplace and Box windows (up to 2' into all setbacks)
- Balconies, Awnings, Overhang Eaves (up to 2' into all setbacks)
- Bay windows (up to 4' into front end rear setbacks;
- Stoops and Stairs (up to 5' into front and rear setbacks)
- Suspended planter/flower boxes up to 24" into all setbacks
- Foundation encroachments of 4"-6" are allowed for architectural details such as brick ledges

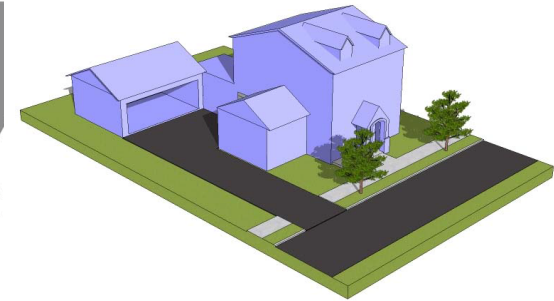

View and Plan: Alley Load Chalet Home with Attached Garage

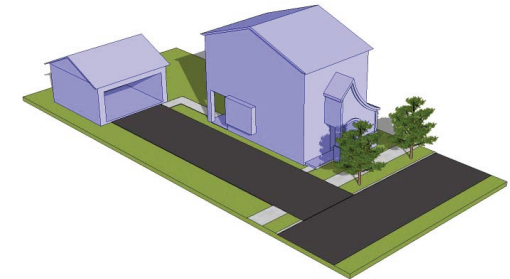

View and Plan: Side Drive Chalet Home with Detached Garage



All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS


- Lot Area: 4,000 SF min.
- Lot Width: 40' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Side Drive, 2 spaces
- Maximum Density: 6 du/ac.
- Minimum Front Yard Setback: 20'
- Maximum Interior Side Yard Setback: 5'
(except for Zero lot line types where 10 min. side setback is required on one side and 0' on the other)
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 22'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 1,500 SF

EXCEPTIONS TO MINIMUM SETBACK:


Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other.
 *Product type only allowed when rear yard is adjacent to open space.

ALLOWED ENCROACHMENT INTO SETBACK

- Porches (up to 8' into front setback and corner side yard setback)
- Fireplace and Box windows (up to 2' into all setbacks)
- Balconies, Awnings, Overhang Eaves (up to 2' into all setbacks)
- Bay windows (up to 4' into front end rear setbacks;
- Stoops and Stairs (up to 5' into front and rear setbacks)
- Suspended planter/flower boxes up to 24" into all setbacks
- Foundation encroachments of 4"-6" are allowed for architectural details such as brick ledges

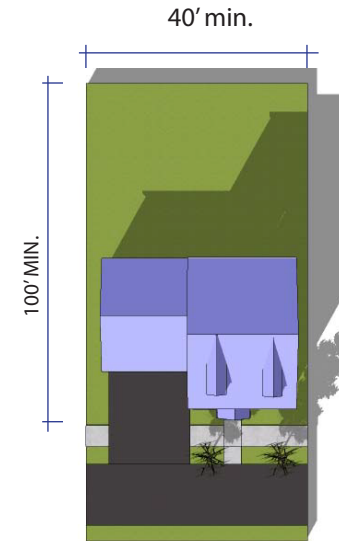

Plan: Front Loaded Chalet Home

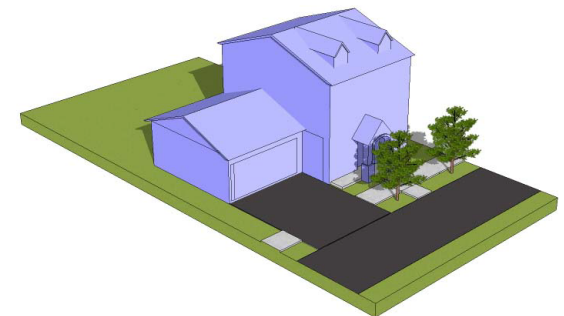

View: Front Loaded Chalet Home




All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS


- Lot Area: 4,000 SF min.
- Lot Width: 40' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley, min. 2 spaces
- Maximum Density: 6 du/ac.
- Min. Front Yard Setback: 12'
- Maximum Interior Side Yard Setback: 5' (except for Zero lot line Types where 10 min. side setback is required on one side and 0' on the other)
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 20'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 1,500 SF

EXCEPTIONS TO MINIMUM SETBACK:

Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other.

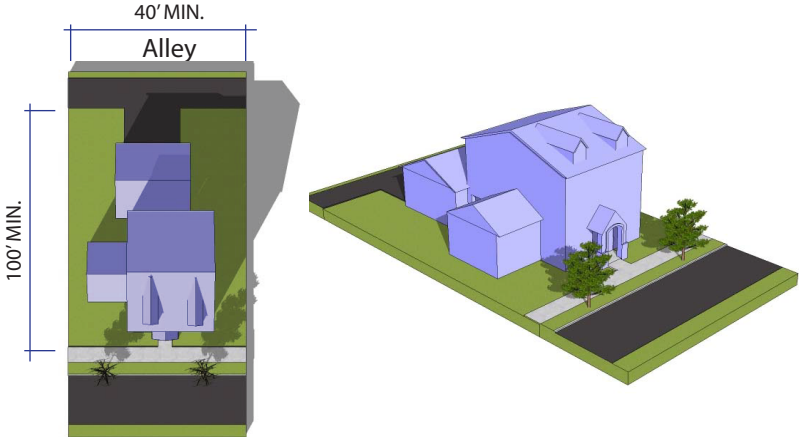

View and Plan: Alley Loaded Chalet Home with Attached Garage

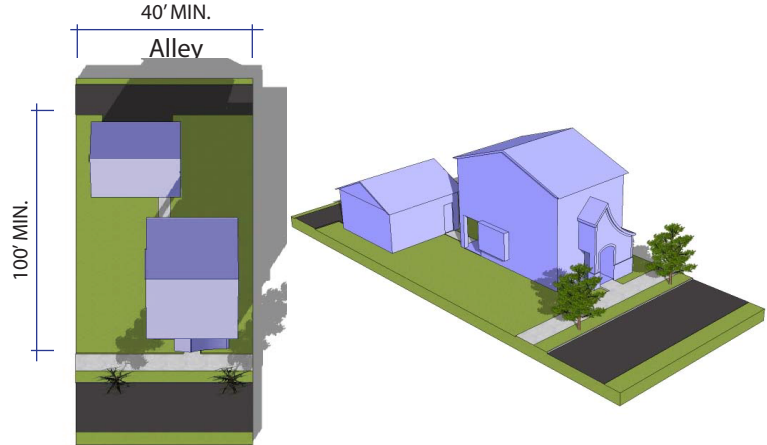

View and Plan: Alley Loaded Chalet Home with Detached Garage



All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

COURTYARD HOMESITES

SF-D2 DETACHED RESIDENTIAL

A Courtyard Homes is a block type in which alley-fed small or single family lots are arranged on both sides of a linear common court. This configuration accommodates single story living popular with an older population. Units can also be modified for wheelchairs use for specific needs.

HOUSING TYPE ELEMENTS

6-plex Module Lot area: 25,600 SF min.

** Lot area of each unit is 4,000 SF min

6-plex Module Width: 150' min.

**Lot Width of each unit is 50'

6-plex Module Depth: 160' min.

Note: Lot Depth of each unit is 80'

Maximum Number of Stories: 2

Garage Orientation: Alley, 2 Spaces

Maximum Density: 8 du/ac.

Minimum Front Yard Setback: 12'

Minimum Interior Side Yard Setback: 5'

(except for Zero Lot Line Types where 10' min. side setbacks is required on one side one 0' on the other)

Minimum Corner Side Yard Setback: 10'

Minimum Rear Yard Setback: 5'

Minimum Garage Setback: 20'

Minimum Lot Coverage: 80%


Minimum Dwelling Unit Size: 1,750 SF

EXCEPTIONS TO MINIMUM SETBACK:

Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other.



Plan: Individual Courtyard Homesite

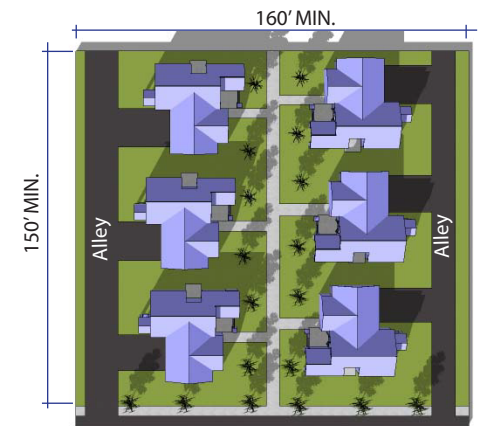

Plan: Cluster of Courtyard Homesites



View: Courtyard Homesites Cluster



All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS



- Lot Area: 5,000 SF min.
- Lot Width: 50' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Side Drive, min 2 spaces
- Maximum Density: 5 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5' (except for zero Lot line Types where 10' min. side setback is required on one side and 0' on the other)
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 20'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 1,750 SF

EXCEPTIONS TO MINIMUM SETBACK:



Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other.

ALLOWED ENCROACHMENT INTO SETBACK

- Porches (up to 8' in a front setback and corner side yard setback)
- Fireplace and Box windows (up to 2' into all setbacks)
- Balconies, Awnings, Overhang Eaves (up to 2' into all setback)
- Bay windows (up to 4' into front and rear setbacks;
- Stoops and Stairs (up to 5' into front and rear setbacks)
- Suspended planter/flower boxes up to 24" into all setback
- Foundation encroachments of 4"-6" are allowed for architectural details such as brick ledges

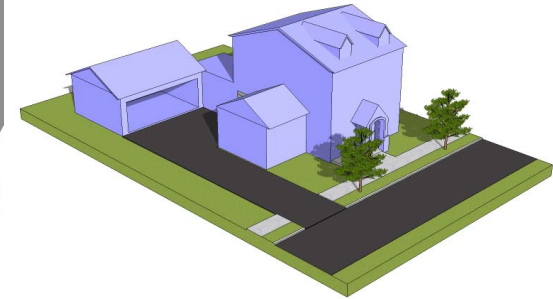

View and Plan: Side Drive Home with Attached Garage

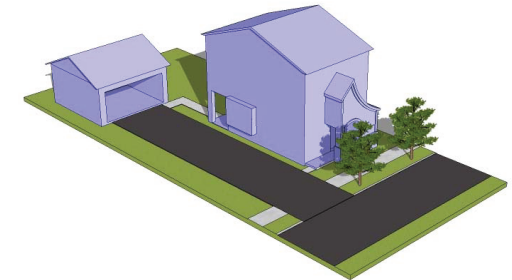

View and Plan: Side Drive Executive Home with Detached Garage



All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.


Executive Homes are the most currently used traditional lot types, these allow a moderate size backyard.

HOUSING TYPE ELEMENTS


- Lot Area: 5,000 SF min.
- Lot Width: 50' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley, min. 2 spaces
- Maximum Density: 5 du/ac.
- Min./Max. Front Yard Setback: 12'
- Maximum Interior Side Yard Setback: 5' (except for Zero lot line Types where 10 min. side setback is required on one side and 0' on the other)
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 20'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 1,750 SF

EXCEPTIONS TO MINIMUM SETBACK:

Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other.

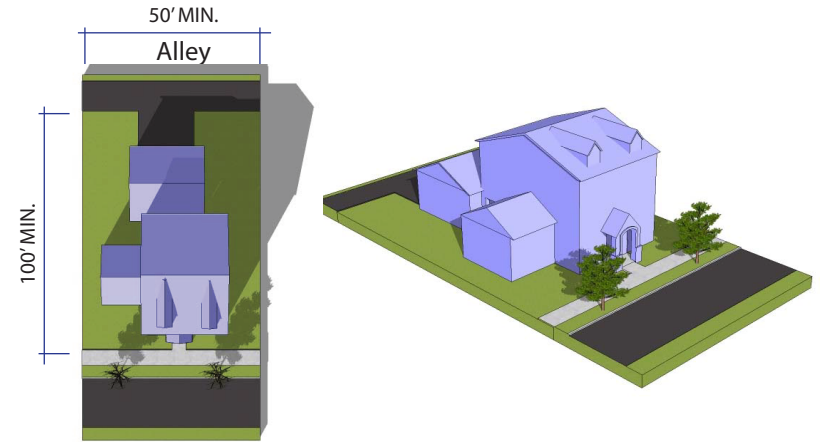

View and Plan: Alley Loaded Executive Home with Attached Garage

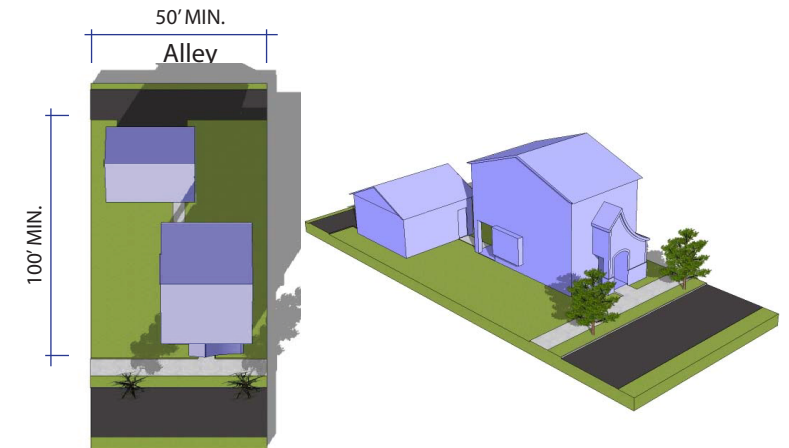

View and Plan: Alley Loaded Executive Home with Detached Garage




All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS


- Lot Area: 5,000 SF min.
- Lot Width: 50' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Side Drive, min 2 spaces
- Maximum Density: 5 du/ac.
- Min. Front Yard Setback: 20'
- Minimum Interior Side Yard Setback: 5' (except for zero Lot line Types where 10' min. side setback is required on one side and 0' on the other)
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: 22'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 1,750 SF

EXCEPTIONS TO MINIMUM SETBACK:

Except for zero lot line types where 10' minimum side yard is required on one side and zero feet on the other.

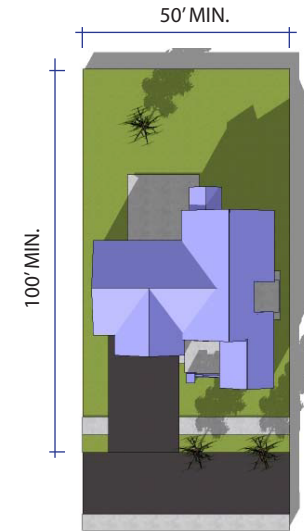

View: Front Load Executive Home

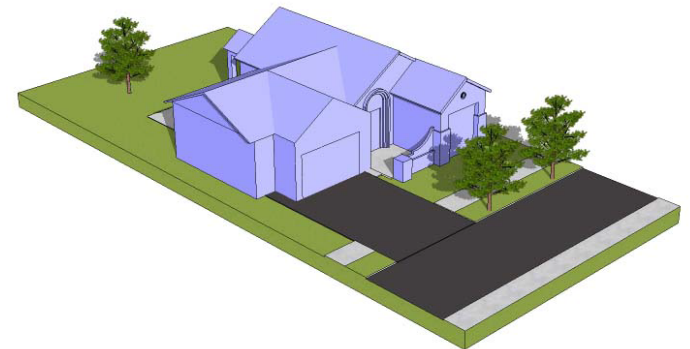

Plan: Front Load Executive Home





All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS



- Lot Area: 6,000 SF min.
- Lot Width: 60' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley, Min. 2 spaces, 3 allowed.
- Maximum Density (60' Width): 4 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5'
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: subject to Section 6(b) of the PD
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 2,000 SF

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory building maybe reduced to 5' when greater setback would be otherwise required.

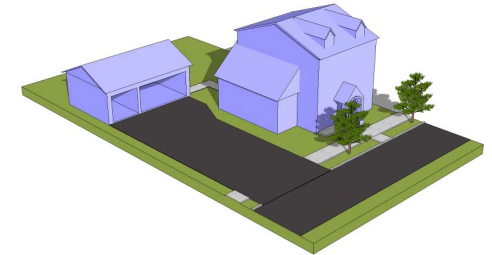

View and Plan: Side Drive Manor Home with Detached Garage

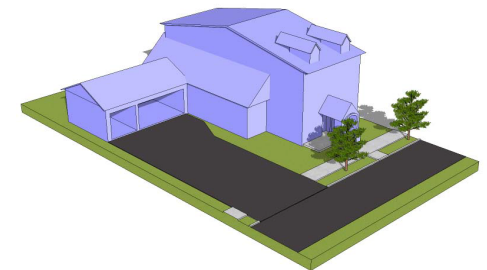

View and Plan: Side Drive Manor Home with Attached Garage


All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS


- Lot Area: 6,000 SF min.
- Lot Width: 60' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley, Min. 2 spaces, 3 allowed.
- Maximum Density (60' Width): 4 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5'
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: subject to Section 6(b) of the PD
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 2,000 SF

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory building maybe reduced to 5' when greater setback would be otherwise required.

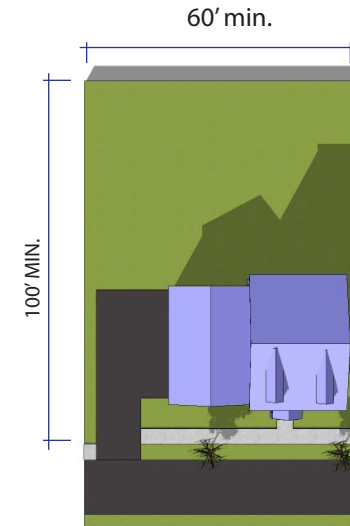

Plan: Traditional Type Manor Home

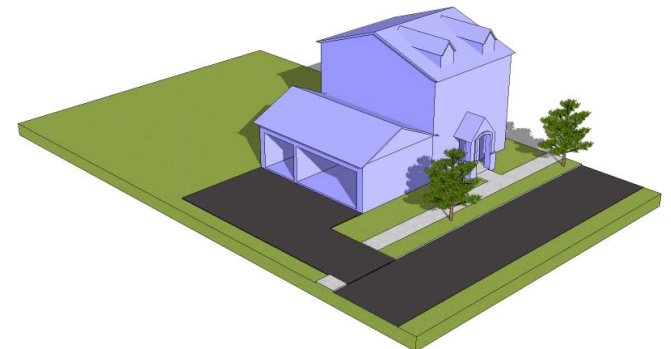

View: Traditional Type Manor Home




All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS


- Lot Area: 6,000 SF min.
- Lot Width: 60' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley, Min. 2 spaces, 3 allowed.
- Maximum Density (60' Width): 4 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5'
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: subject to Section 6(b) of the PD
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 2,000 SF

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory building maybe reduced to 5' when greater setback would be otherwise required.

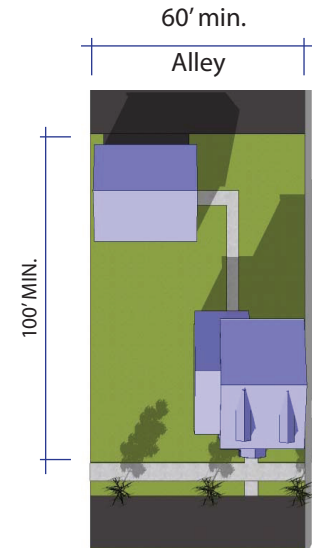

Plan: Alley Load Manor Home

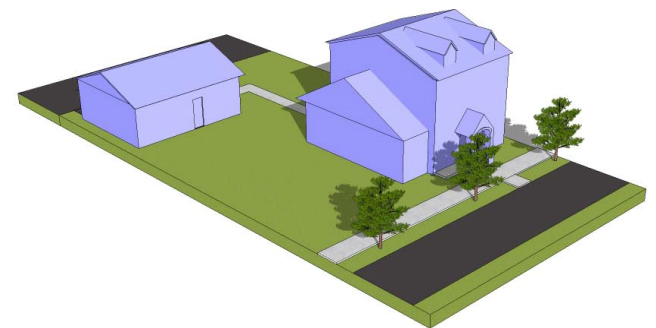

View: Alley Load Manor Home




All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS


- Lot Area: 6,000 SF min.
- Lot Width: 60' min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Alley, Min. 2 spaces, 3 allowed.
- Maximum Density (60' Width): 4 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5'
- Minimum Corner Side Yard Setback: 10'
- Minimum Rear Yard Setback: 5'
- Minimum Garage Setback: subject to Section 6(b) of the PD
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 2,000 SF

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory building maybe reduced to 5' when greater setback would be otherwise required.

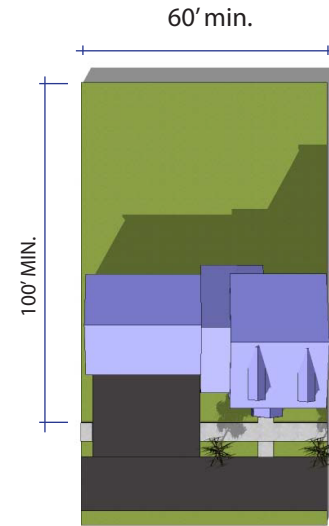

Plan: Front Load Manor Home

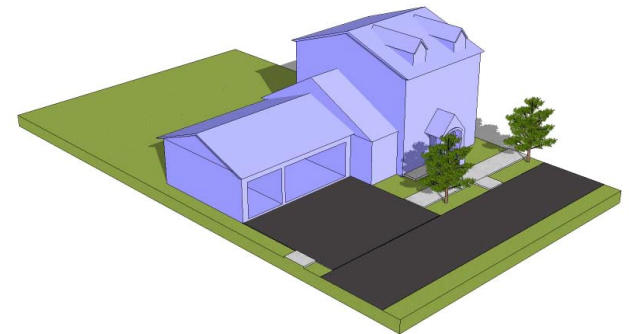

View: Front Load Manor Home




All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS


- Lot Area: 7,000 SF min.
- Lot Width: 70' SF min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Front, Min. 2 spaces, 3 allowed.
- Maximum Density (70' Width): 3.5 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5'
- Minimum Corner Side Yard Setback 10'
- Minimum Front Garage Setback for front loaded lots: 20'
- Minimum Rear Yard Setback: 5'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 2,400 SF

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory building maybe reduced to 5' when greater setback would be otherwise required.

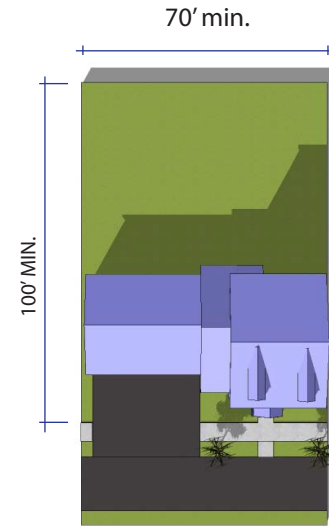

Plan: Front Load Chateau Home

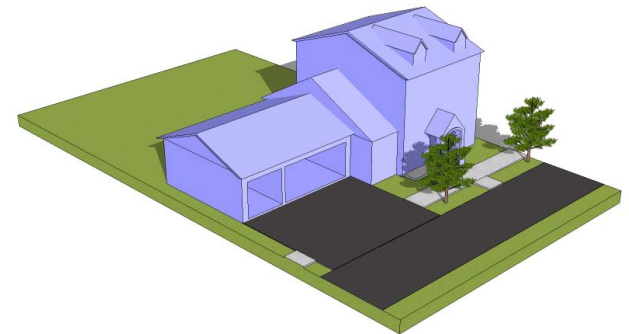

View: Front Load Chateau Home




All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS


- Lot Area: 7,000 SF min.
- Lot Width: 70' SF min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Front, Min. 2 spaces, 3 allowed.
- Maximum Density (70' Width): 3.5 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5'
- Minimum Corner Side Yard Setback 10'
- Minimum Front Garage Setback for front loaded lots: 20'
- Minimum Rear Yard Setback: 5'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 2,400 SF

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory building maybe reduced to 5' when greater setback would be otherwise required.

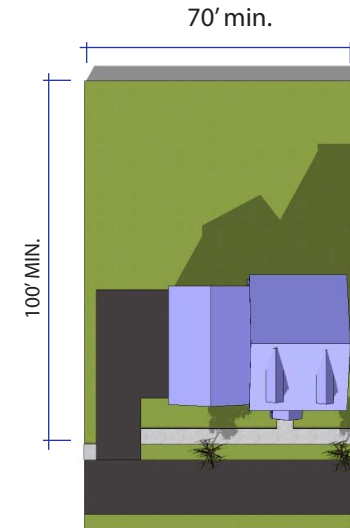

Plan: Traditional Type Chateau Home

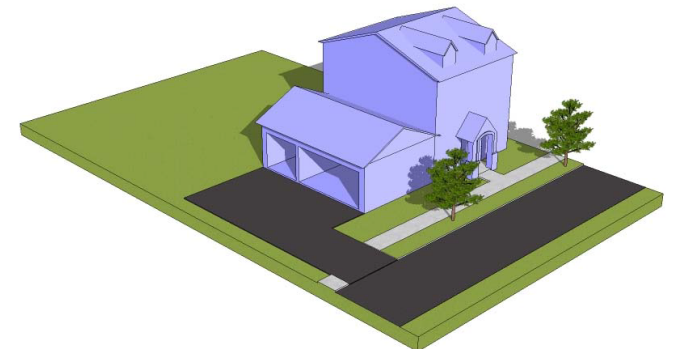

View: Traditional Type Chateau Home





All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS



- Lot Area: 7,000 SF min.
- Lot Width: 70' SF min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Front, Min. 2 spaces, 3 allowed.
- Maximum Density (70' Width): 3.5 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5'
- Minimum Corner Side Yard Setback 10'
- Minimum Front Garage Setback for front loaded lots: 20'
- Minimum Rear Yard Setback: 5'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 2,400 SF

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory building maybe reduced to 5' when greater setback would be otherwise required.

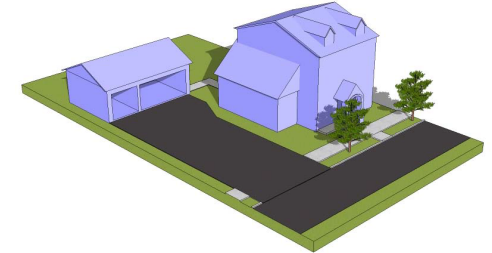

View and Plan: Side Drive Chateau Home with Detached Garage

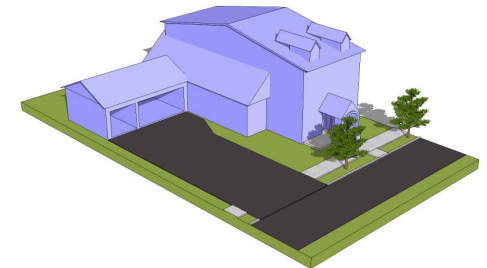

View and Plan: Side Drive Chateau Home with Attached Garage




All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

HOUSING TYPE ELEMENTS


- Lot Area: 7,000 SF min.
- Lot Width: 70' SF min.
- Lot Depth: 100' min.
- Maximum Numbers of Stories: 2
- Garage Orientation: Front, Min. 2 spaces, 3 allowed.
- Maximum Density (70' Width): 3.5 du/ac.
- Min. Front Yard Setback: 12'
- Minimum Interior Side Yard Setback: 5'
- Minimum Corner Side Yard Setback 10'
- Minimum Front Garage Setback for front loaded lots: 20'
- Minimum Rear Yard Setback: 5'
- Maximum Lot Coverage: 75%
- Minimum Dwelling Unit Size: 2,400 SF

EXCEPTIONS TO MINIMUM SETBACK:

Minimum side setback to detached garages or accessory building maybe reduced to 5' when greater setback would be otherwise required.

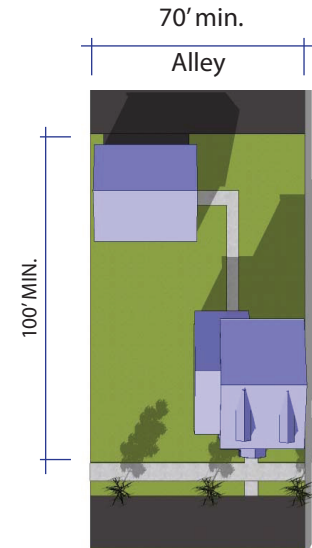

Plan: Alley Load Chateau Home

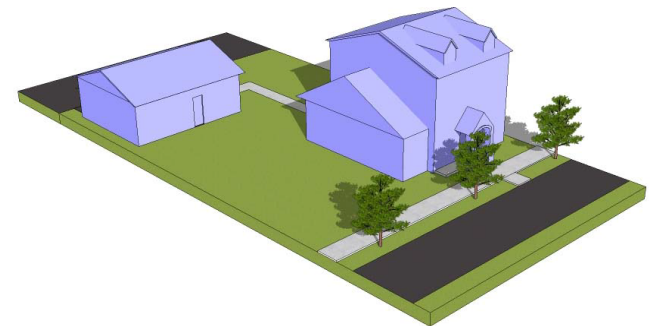


View: Alley Load Chateau Home



All drawings and dimensions not to scale. Street tree locations shown are illustrative only and are not to scale.

Exhibit G
Anti-Repetition Requirements for Single Family Detached Homes and Duplexes

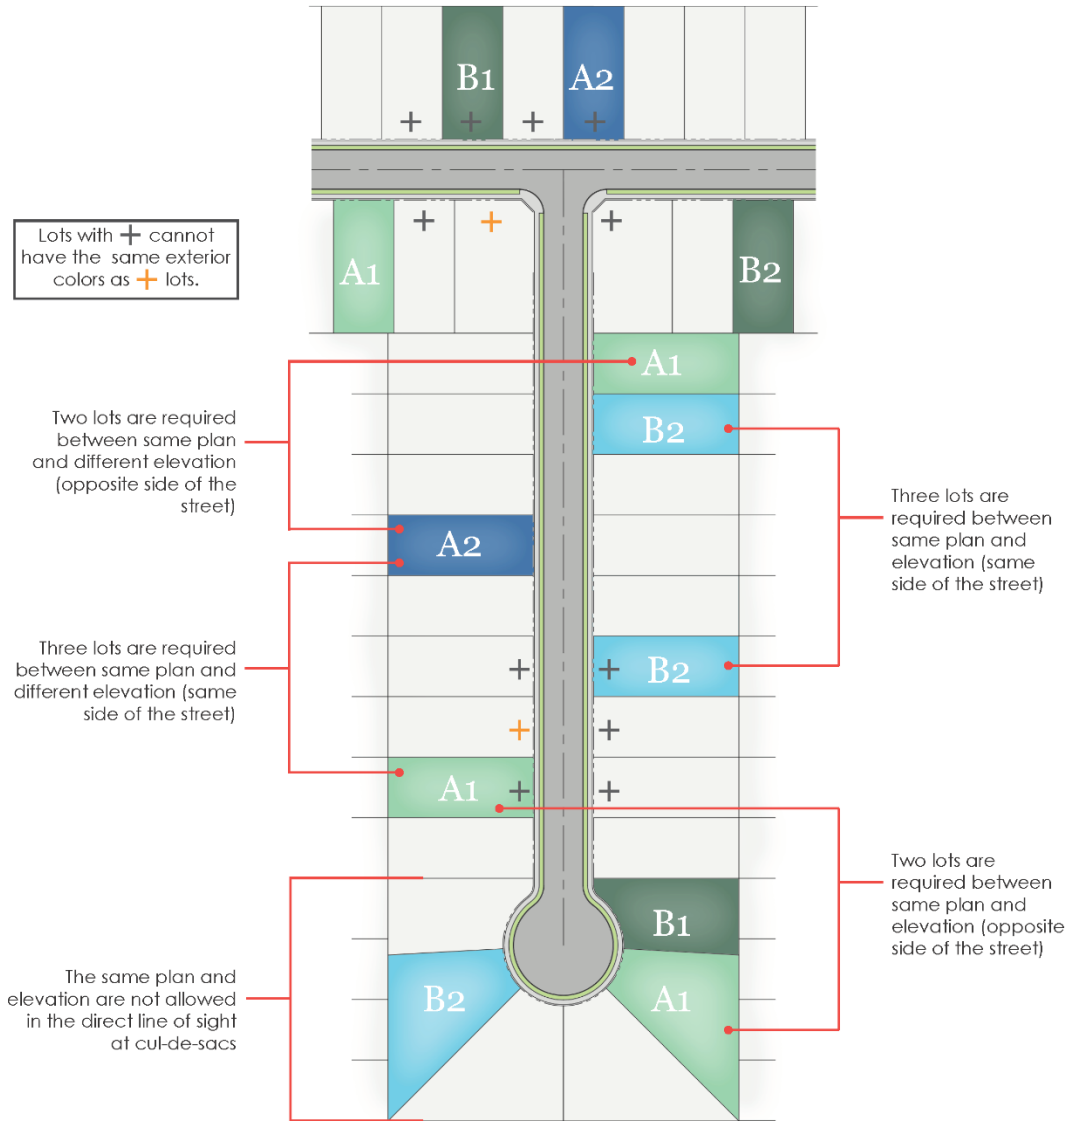

Repetition Guidelines are as follows:

Same side of street -

- Same plan, same elevation must have 3 lots in between,
- Same plan, different elevation must have 3 lot in between


Opposite side of the street -

- Same plan, same elevation must have 2 complete lots in between.
- Same plan, different elevation must have 2 complete lot in between.

Exterior colors

- Exterior colors may not be the same side by side, or in direct line of sight, regardless of plan or elevation. Direct line of sight refers to the 3 lots directly across the street.

Exhibit H Tree Preservation Exhibit

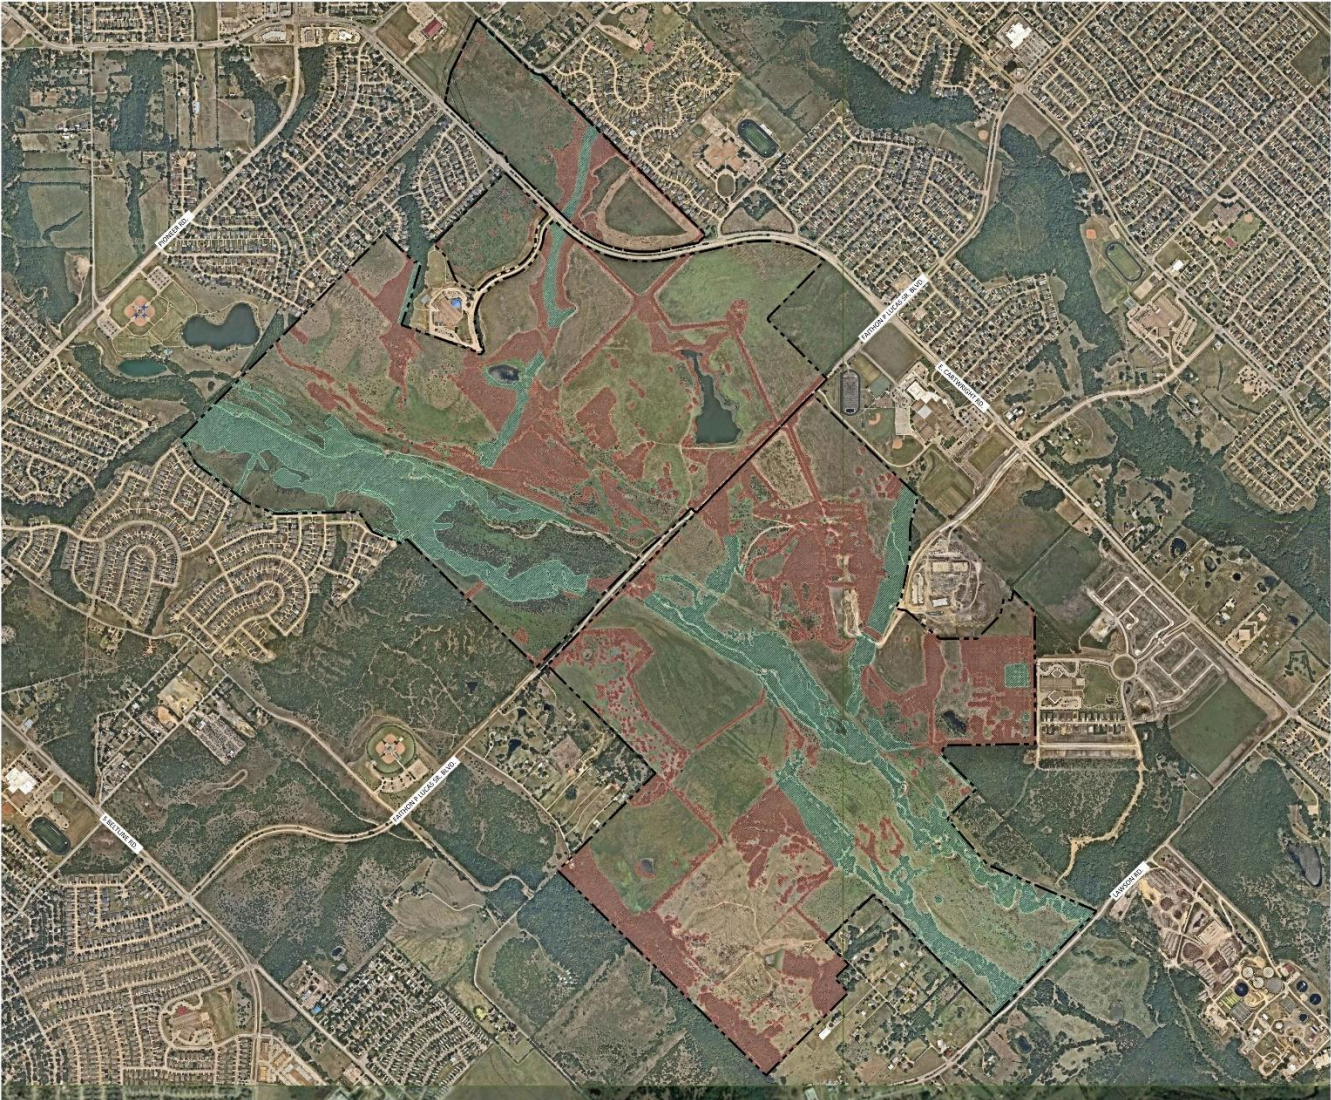

NORTH
0 300 600 1200
02.09.2010

--- PROPERTY LIMITS
 ■ EXISTING TREE CANOPY TO BE REMOVED
 ■ EXISTING TREE CANOPY TO REMAIN

TREE SUMMARY TABLE		
CATEGORY	SF	%
EXISTING TREE CANOPY TO REMAIN	6,438,225	40%
EXISTING TREE CANOPY TO BE REMOVED	12,627,336	60%
TOTAL EXISTING TREE CANOPY	19,065,561	100%

Tree Preservation Exhibit for **Solterra**

PLANNER: Thomas Meurer

LA

Land & Master Planning
 Land Use/Planning
 Studies
 Sustainable Design
 Urban Design
 Landscape Architecture


1150 South Central Expressway
 Suite 100, Irving, Texas 75039
 P 214.638.2741

Planning & Landscape Architecture


© Copyright 2010 JJA Engineering, Inc. Drawings, written materials, and design concepts provided in accordance herewith by JJA & shall not be reproduced in part or whole in any form or format without written consent of JJA.

This exhibit is an illustrative representation for presentation purposes only and should not be used for completion of construction purposes. The information provided within should be considered a guide to construction to aid in determining plan components and relationships and is subject to change without notice. All project boundaries, easements, road alignments, drainage boundaries, environmental issues and other information shown is approximate and should not be relied upon for any purpose. All materials, methods or means concerning the actual design, accuracy, location, and character of the facilities shown on this exhibit are intended.


Exhibit I Permitted Non-Standard Street Sections

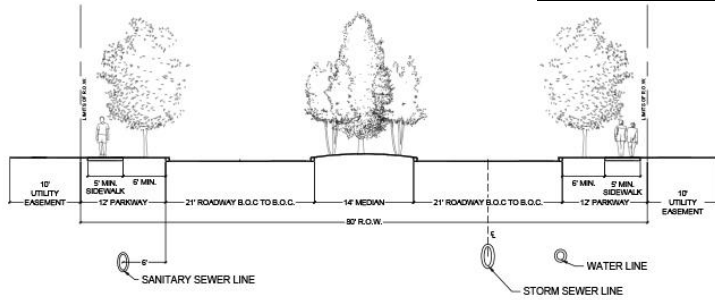


80' R.O.W. - BOULEVARD STREET SECTION

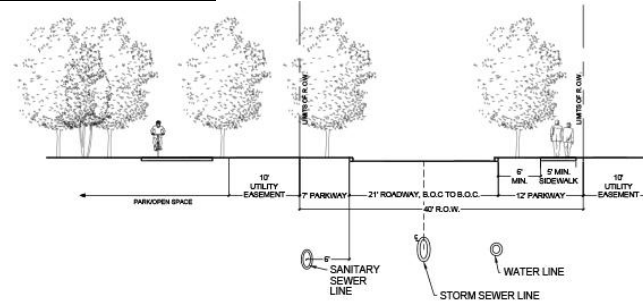


40' R.O.W. - ONE WAY STREET SECTION

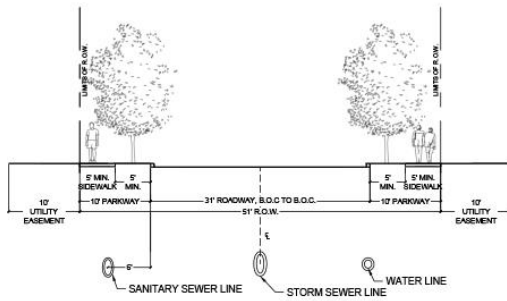

51' R.O.W. - RESIDENTIAL STREET SECTION

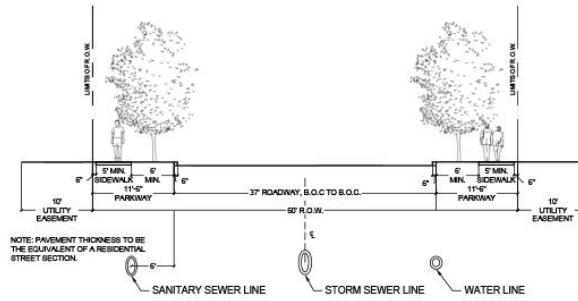

60' R.O.W. - RESIDENTIAL STREET SECTION

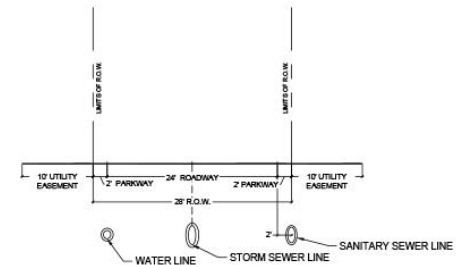

28' MEWS R.O.W. SECTION