

RESOLUTION NO. 24-63

WHEREAS, the City Council of the City of Mesquite, Texas, deems it necessary to amend requirements for the construction of drainage facilities and pavement of public streets, highways, alleys, thoroughfares, sidewalks and other public places, and

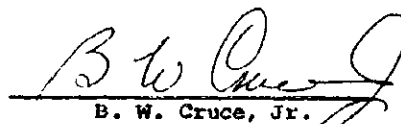
WHEREAS, the present specifications and requirements are deemed to be inadequate;


NOW, THEREFORE, BE IT RESOLVED BY THE CITY COUNCIL OF THE CITY OF MESQUITE, TEXAS:

Section 1. That the specifications for the construction of drainage facilities and pavement for public streets, highways, alleys, thoroughfares, sidewalks and other public places, as heretofore adopted by the City Council, be, and the same are hereby amended so as to provide an alternate method of locating sidewalks and public utility lines, as shown on the copy of said specifications attached hereto and made a part of this Resolution for all purposes. That all provisions of existing standards of the City of Mesquite relating to the locating and construction of sidewalks and public utility lines not in conflict with provisions of this amendment shall remain in full force and effect.

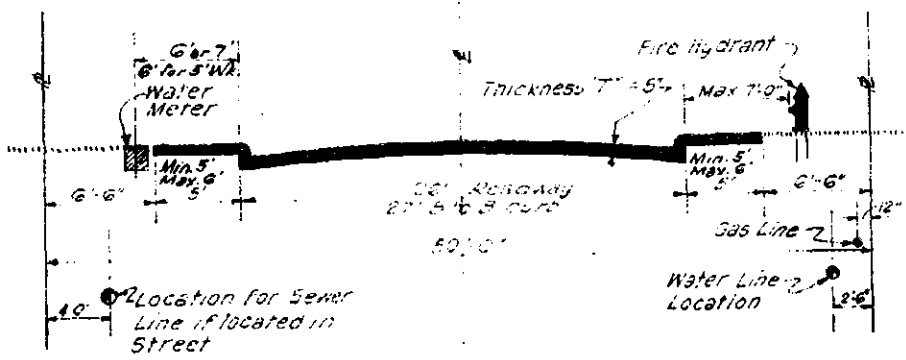
Section 2. That from and after the adoption of this Resolution, all persons, firms or corporations constructing drainage facilities and paving public streets, highways, alleys, thoroughfares, sidewalks and other public places in the City of Mesquite, Texas, must comply with all of the specifications pertaining thereto which are adopted by the Resolutions of the City Council of the City of Mesquite, and as amended herein.

DULY PASSED BY THE CITY COUNCIL of the City of Mesquite, Texas, on the 15 day of July, 1963


B. W. Cruce, Jr.
Mayor

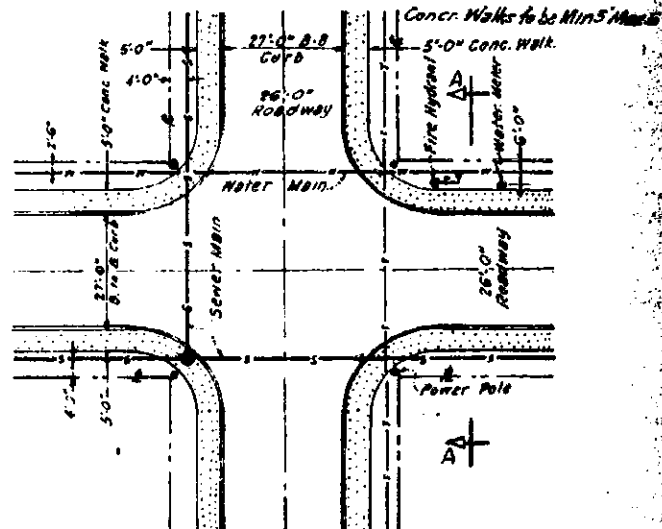
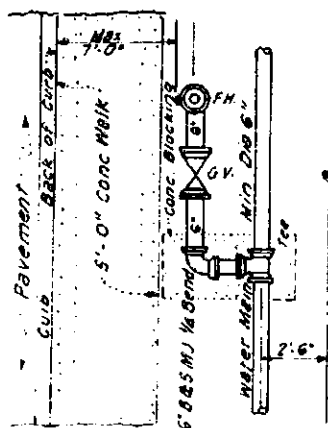
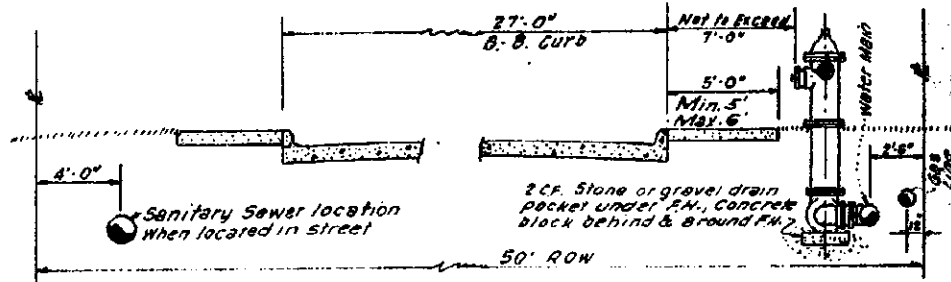
ATTEST:

Norma G. McGaughey
City Secretary

PAVING & DRAINAGE
DRAWING NO. 1 ALTERNATE



CITY OF MESQUITE
STANDARDS FOR CONSTRUCTION
TYPICAL 50' RESIDENTIAL STREET
ALTERNATE CROSS SECTION

WATER & SEWER
DRAWING NO.8 ALTERNATE



CITY OF MESQUITE
STANDARDS FOR CONSTRUCTION
TYPICAL FIRE HYDRANT INSTALLATION