

RESOLUTION NO. 21-83

A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF MESQUITE, TEXAS, AMENDING THE PAVING AND DRAINAGE SPECIFICATIONS OF THE CITY OF MESQUITE TO ESTABLISH REVISED CONSTRUCTION STANDARDS FOR ALLEY PAVING; AND PROVIDING AN EFFECTIVE DATE THEREOF.

WHEREAS, the present specifications for alley construction are deemed to be inadequate;

NOW, THEREFORE, BE IT RESOLVED BY THE CITY COUNCIL OF THE CITY OF MESQUITE, TEXAS:

SECTION 1. That the Paving and Drainage Specifications of the City of Mesquite are hereby amended in accordance with revised Paving and Drainage Drawing No. 6, "Standards for Construction, Alley Paving" of said specifications, a copy of which is attached hereto and made a part hereof for all intents and purposes.


SECTION 2. That from and after the adoption of this Resolution, all plans and specifications for the construction of public alleys submitted to the City of Mesquite for approval shall conform to the revised specifications referred to in Section 1 above.

SECTION 3. That this Resolution shall take effect immediately upon passage as the Charter in such cases provides.


DULY RESOLVED by the City Council of the City of Mesquite, Texas, on the 16th day of May, A.D., 1983.


MRS. BRUNHILDE NYSTROM
MAYOR

ATTEST:

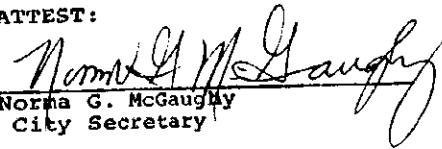

Norma G. McGaughey
City Secretary

13 00246

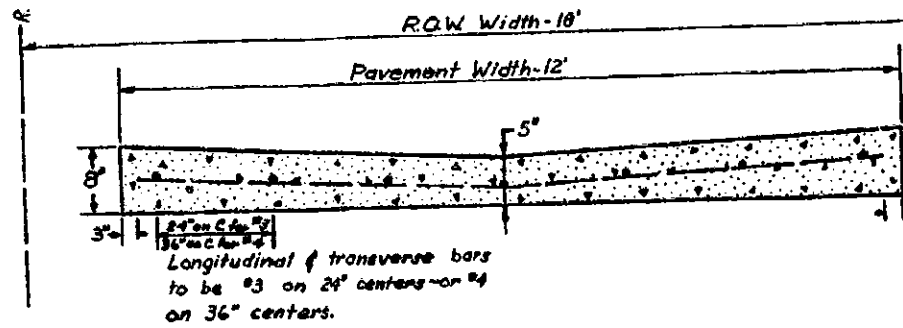

NOTE: Alley pavement to be 5'-8" thick reinforced concrete, 5 sack cement per cubic yard. Contraction joint spacing not to exceed 20'-0".

ALLEY PAVING SECTION

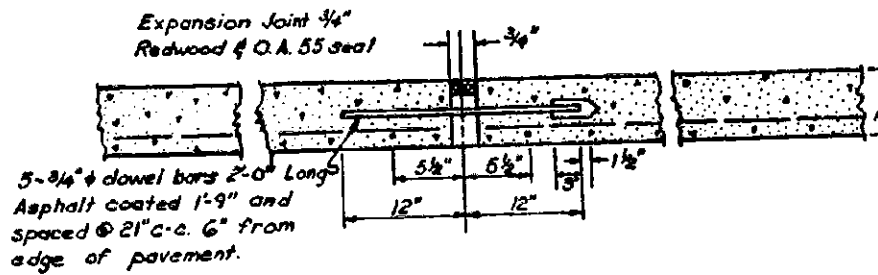

Sleeves for dowels shall have an inside diameter of 1/8" greater than that of dowel & be of quality & design as to provide free movement of the dowel bar.

TRANSVERSE EXPANSION JOINT

Provide expansion joint at each end of alley approach and at maximum of 600' spacing.

CITY OF MESQUITE
STANDARDS FOR CONCRETE
ALLEY PAVING

Revised - May 1983